



(HEADQUARTER)

A MAN POWER TRANSMISSION CO., LTD.
9F-2, No.12, Zhonghua Rd., Yongkang Dist.,
Tainan City 710, Taiwan
Tel.: + 886-6-311 3166
Fax: + 886-6-312 8266
E-mail: sales@amgroup.tw

(THAILAND LOGISTIC CENTER)

79/240-241 Moo 19 Soi Tanasit, Thepharak Rd., Bangphi,
Samut Prakan 10540, Thailand
Tel.: + 66-2-1306720~721
Fax: + 66-2-1306722
E-mail: sales@ampower.co.th

(CHINA LOGISTIC CENTER)

No.165 Zhenghe Middle Rd., Ludu Town, Taicang City,
Jiangsu Province, China
Tel.: + 86-512-5345 7988
Fax: + 86-512-5345 0286

No.23 Xinyuan S. Rd., Shahu Village, Tangxia Town,
Dongguan City, Guangdong Province, China
Tel.: + 86-769-8200 8808
Fax: + 86-769-8200 8800

No.2 Xinfang, Rd., Area B, Luohuang Industrial Zone,
Jiangjin Dist., Chongqing City, China
Tel.: + 86-23-4763 7728
Fax: + 86-23-4763 7726

Sian Town Industrial Zone, Changxing County, Huzhou City,
Zhejiang Province, China
Tel.: + 86-572-682 2777

ISO 9001 CERTIFIED
IATF16949 CERTIFIED

Industrial Chain





Precise and Powerful
Transmission



TABLE OF CONTENTS

A

003-005 A Series Standard Roller Chain

B

006-008 B Series Standard Roller Chain

C

015 Car Parking System Series Chain

D

014 Double Pitch Stainless Steel Conveyor Roller Chain

021 Double Pitch Side-Roller Chain

029-030 Double Pitch Extended Pin Roller Chain

035-037 Double Pitch Conveyor Chain Attachments

043-044 Double Pitch Stainless Steel Conveyor Chain Attachments

E

027-028 Extended Pin Roller Chain

F

018-019 Free Flow Chain

TABLE OF CONTENTS

L

023-026 Leaf Chain

038-040 Large Pitch Conveyor Chain Attachments

022 Lumber Conveyor Chain

O

016 O-ring Chain

045 O-ring Chain Attachments

R

013 Rust & Corrosion Resistant Series Chain

S

010-012 Stainless Steel Chain

041-042 Stainless Steel Roller Chain Attachments

031-034 Standard Roller Chain Attachments


017 Self-Lubrication Roller Chain

009 Side Bow Chain

020 Side-Roller Chain

A Series Standard Roller Chain


Single strand roller & bushing chain

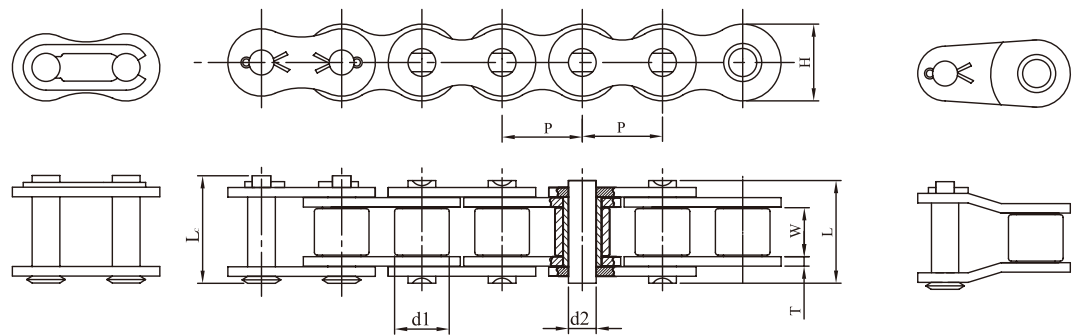

ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Allowed Load
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
08A	40	40	12.70	7.85	7.92	3.98	17.80	21.0	12.07	1.50	1420	1950	370
10A	50	50	15.875	9.40	10.16	5.09	21.80	25.0	15.09	2.0	2230	3000	650
12A	60	60	19.05	12.57	11.91	5.96	26.90	31.0	18.0	2.35	4000	4100	920
16A	80	80	25.40	15.75	15.88	7.94	33.50	38.0	24.13	3.20	5680	7500	1500
20A	100	100	31.75	18.90	19.05	9.54	41.10	47.0	30.17	4.0	8880	12100	2300
24A	120	120	38.10	25.22	22.23	11.11	50.80	57.0	36.20	4.70	12770	16000	3100
28A	140	140	44.45	25.22	25.40	12.71	54.90	62.0	42.23	5.50	17380	21000	4100
32A	160	160	50.80	31.55	28.58	14.29	65.50	73.0	48.26	6.40	22800	30000	5400
40A	200	200	63.50	37.85	39.68	19.85	80.40	90.0	60.33	8.0	35460	46000	7300
48A	240	240	76.20	47.35	47.63	23.81	95.50	106.0	72.39	9.50	53110	67500	10100


A Series Standard Roller Chain

Double strand roller chain

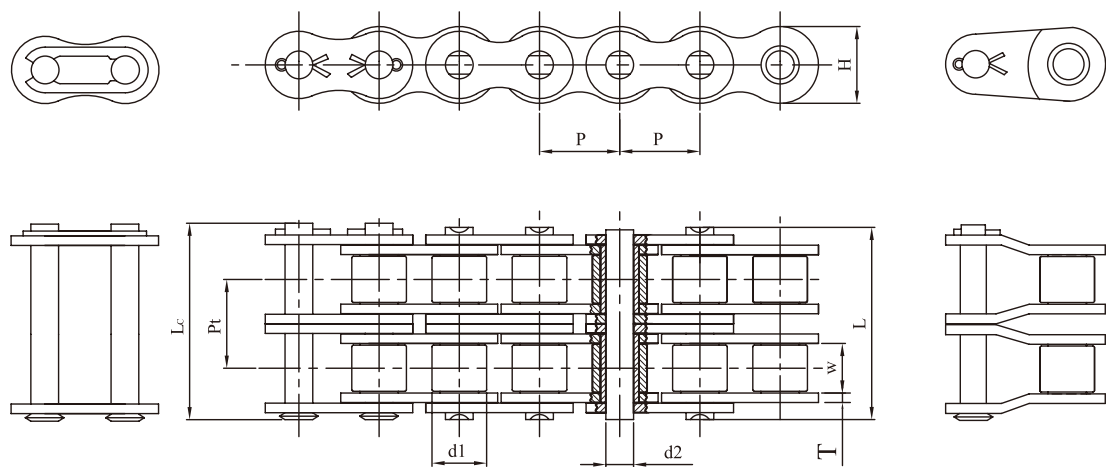

ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Allowed Load	Transverse Pitch Of Strand
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		max	Pt
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf	mm
08A-2	40-2	40-2	12.70	7.85	7.92	3.98	32.30	36.20	12.07	1.50	2840	3900	630	14.38
10A-2	50-2	50-2	15.875	9.40	10.16	5.09	39.90	44.0	15.09	2.0	4450	6200	1100	18.11
12A-2	60-2	60-2	19.05	12.57	11.91	5.96	49.80	54.40	18.10	2.35	6400	8400	1530	22.78
16A-2	80-2	80-2	25.40	15.75	15.88	7.94	62.70	68.10	24.13	3.20	11360	15000	2550	29.29
20A-2	100-2	100-2	31.75	18.90	19.05	9.54	77.0	83.10	30.17	4.0	17760	24200	3900	35.76
24A-2	120-2	120-2	38.10	25.22	22.23	11.11	96.30	102.9	36.20	4.70	25540	32000	5250	45.44
28A-2	140-2	140-2	44.45	25.22	25.40	12.71	103.60	111.0	42.23	5.50	34760	42000	6970	48.87
32A-2	160-2	160-2	50.80	31.55	28.58	14.29	124.20	132.10	48.26	6.40	45600	60000	9150	58.55
40A-2	200-2	200-2	63.50	37.85	39.68	19.85	151.90	162.10	60.33	8.0	70920	92000	12400	71.55
48A-2	240-2	240-2	76.20	47.35	47.63	23.81	183.40	193.90	72.39	9.50	106220	135000	17150	87.83


A Series Standard Roller Chain

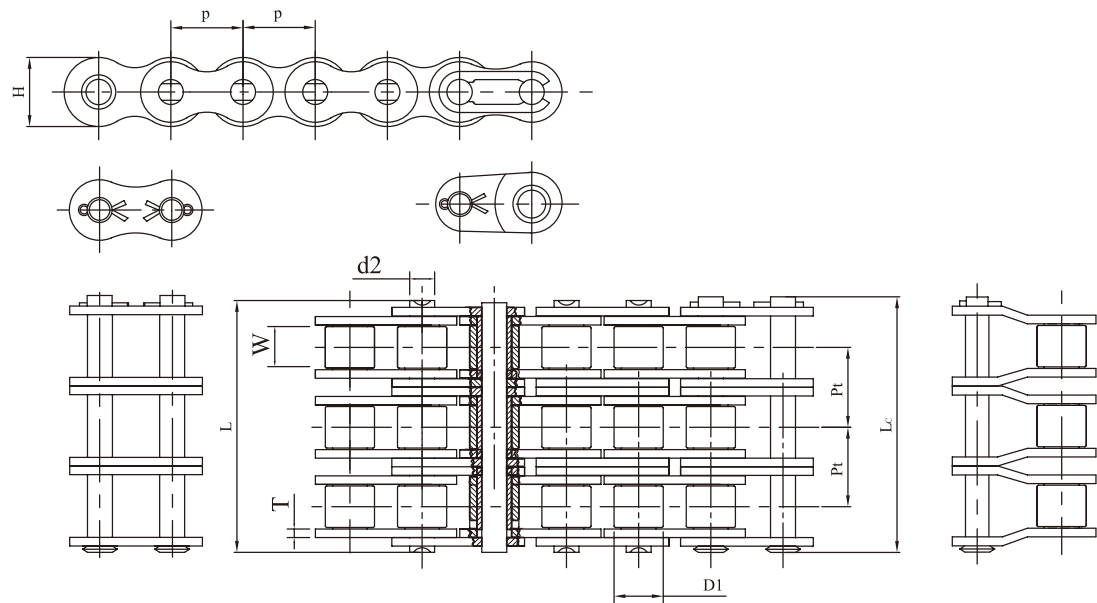

ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Transverse Pitch Of Strand
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	min	kgf	Pt
			mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
08A-3	40-3	40-3	12.70	7.85	7.92	3.98	46.70	49.70	12.0	1.50	4250	5525	14.38
10A-3	50-3	50-3	15.875	9.40	10.16	5.09	57.90	60.90	15.0	2.0	6675	8677	18.11
12A-3	60-3	60-3	19.05	12.58	11.91	5.96	72.60	76.60	18.0	2.35	9535	12395	22.78
16A-3	80-3	80-3	25.40	15.75	15.87	7.94	91.90	96.0	24.10	3.20	17050	22165	29.29
20A-3	100-3	100-3	31.75	18.90	19.05	9.54	113.0	118.0	30.10	4.0	26560	34528	35.76
24A-3	120-3	120-3	38.10	25.23	22.22	11.11	141.70	147.70	36.20	4.70	38200	49660	45.44
28A-3	140-3	140-3	44.45	25.23	25.40	12.71	152.40	158.50	42.20	5.50	51750	67275	48.87
32A-3	160-3	160-3	50.80	31.55	28.57	14.29	182.90	189.0	48.20	6.40	68100	88530	58.55
40A-3	200-3	200-3	63.50	37.85	39.67	19.85	206.0	214.0	60.30	8.0	106500	138450	71.55
48A-3	240-3	240-3	76.20	47.35	47.62	23.81	227.20	235.50	72.40	9.50	153200	199160	87.33

B Series Standard Roller Chain


Single strand roller chain

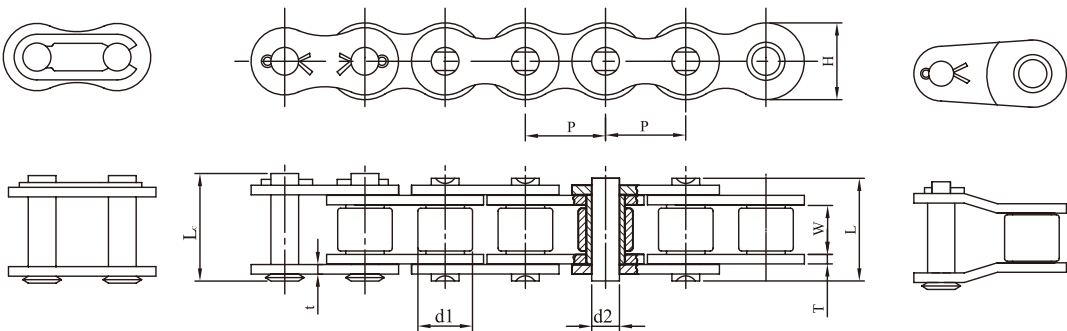

ISO Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength
		P	W min	d1 max	d2 max	L max	Lc max	H max	T	min	kgf
		mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
08B	08B	12.70	7.75	8.51	4.45	17.0	20.70	11.81	1.50	1820	1950
10B	10B	15.875	9.65	10.16	5.08	19.60	23.70	14.73	1.70	2270	2800
12B	12B	19.05	11.68	12.07	5.72	22.70	27.30	16.10	1.80	2950	3350
16B	16B	25.40	17.02	15.88	8.28	36.10	41.50	21.0	4.0/3.0	6130	7500
20B	20B	31.75	19.56	19.05	10.19	43.20	49.30	26.42	4.50/3.50	9700	10850
24B	24B	38.10	25.40	25.40	14.63	53.40	60.0	33.40	6.0/5.0	16330	18200
28B	28B	44.45	30.99	27.94	15.90	65.10	72.50	37.08	7.40/6.40	20410	23000
32B	32B	50.80	30.99	29.21	17.81	67.40	75.30	42.29	7.0/6.0	25520	28500
40B	40B	63.50	38.10	39.37	22.89	82.60	92.60	52.96	8.50/8.0	36230	40500
48B	48B	76.20	45.72	48.26	29.24	99.10	109.10	63.88	12.0/9.50	57150	63500


B Series Standard Roller Chain

Double strand roller chain

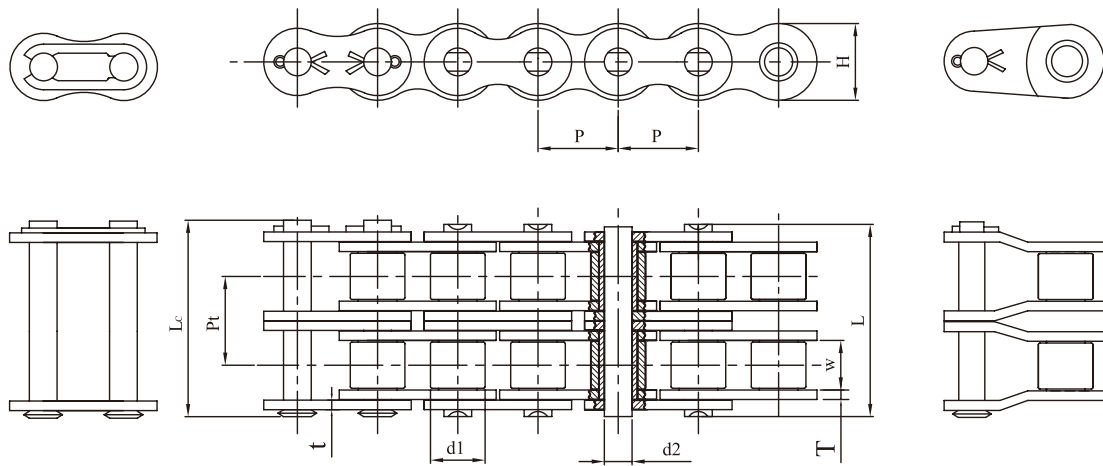


ISO Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Transverse Pitch Of Strand
		P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		Pt
		mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
08B-2R	08B-2R	12.70	7.75	8.51	4.45	31.0	34.90	11.81	1.50	3180	3850	13.92
10B-2R	10B-2R	15.875	9.65	10.16	5.08	36.20	40.30	14.73	1.70	4550	5600	16.59
12B-2R	12B-2R	19.05	11.68	12.07	5.72	42.20	46.80	16.13	1.80	5900	6500	19.46
16B-2R	16B-2R	25.40	17.02	15.88	8.28	68.0	73.40	21.08	4.0/3.0	10820	15000	31.88
20B-2R	20B-2R	31.75	19.56	19.05	10.19	79.0	85.10	26.42	4.50/3.50	17350	21700	36.45
24B-2R	24B-2R	38.10	25.40	25.40	14.63	101.0	107.6	33.40	6.0/5.0	28580	36400	48.36
28B-2R	28B-2R	44.45	30.99	27.94	15.90	124.0	131.40	37.08	7.40/6.40	36740	46000	59.56
32B-2R	32B-2R	50.80	30.99	29.21	17.81	126.0	133.90	42.29	7.0/6.0	45920	57000	58.55
40B-2R	40B-2R	63.50	38.10	39.37	22.89	154.0	164.0	52.90	8.50/8.0	64290	81000	72.29
48B-2R	48B-2R	76.20	45.72	48.26	29.24	190.0	200.0	63.88	12.0/9.50	102050	127000	91.21

B Series Standard Roller Chain

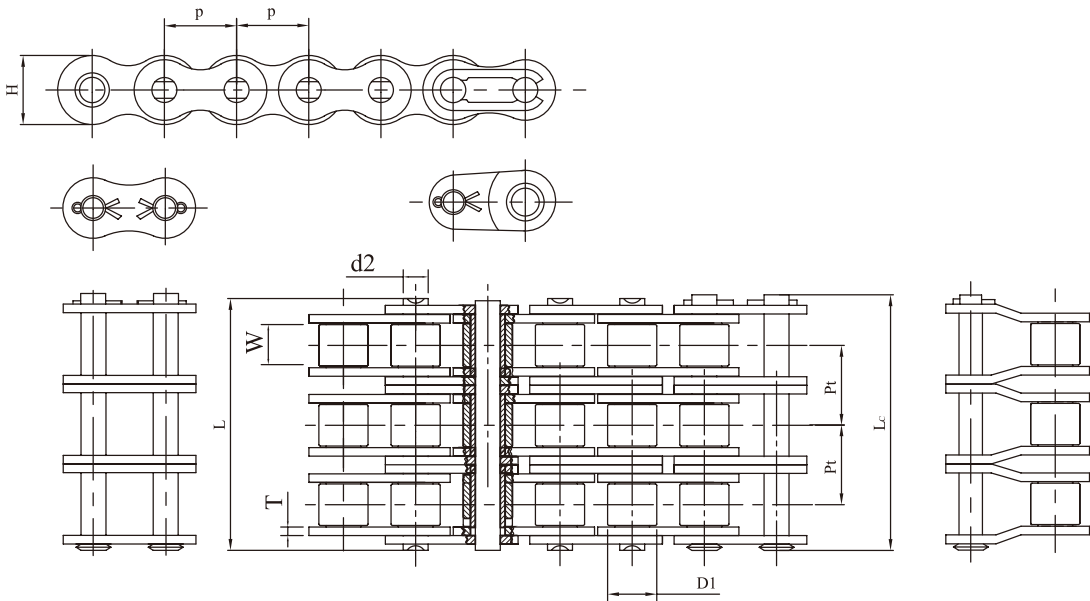

ISO Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Transverse Pitch Of Strand
		P	W min	d1 max	d2 max	L max	Lc max	H max	T	min		Pt
		mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
08B-3	08B-3	12.70	7.75	8.51	4.45	44.90	48.0	11.81	1.50	4550	5915	13.92
10B-3	10B-3	15.875	9.65	10.16	5.08	53.20	56.0	14.73	1.70	6850	8905	16.59
12B-3	12B-3	19.05	11.68	12.07	5.72	61.70	65.70	16.13	1.80	8850	11505	19.46
16B-3	16B-3	25.40	17.02	15.88	8.28	99.90	104.0	21.08	4.0/3.0	16500	21450	31.88
20B-3	20B-3	31.75	19.56	19.05	10.19	116.10	121.0	26.42	4.50/3.50	25550	33215	36.45
24B-3	24B-3	38.10	25.40	25.40	14.63	150.20	155.20	33.40	6.0/5.0	44000	47000	48.36
28B-3	28B-3	44.45	30.99	27.94	15.90	184.30	190.30	37.08	7.40/6.40	54100	60000	59.56
32B-3	32B-3	50.80	30.99	29.21	17.81	184.50	190.50	42.29	7.0/6.0	68400	75000	58.55
40B-3	40B-3	63.50	38.10	39.37	22.89	227.20	234.20	52.96	8.50/8.0	97000	120000	72.29
48B-3	48B-3	76.20	45.72	48.26	29.24	281.60	288.60	63.88	12.0/9.50	153000	180000	91.21


Side Bow Chain

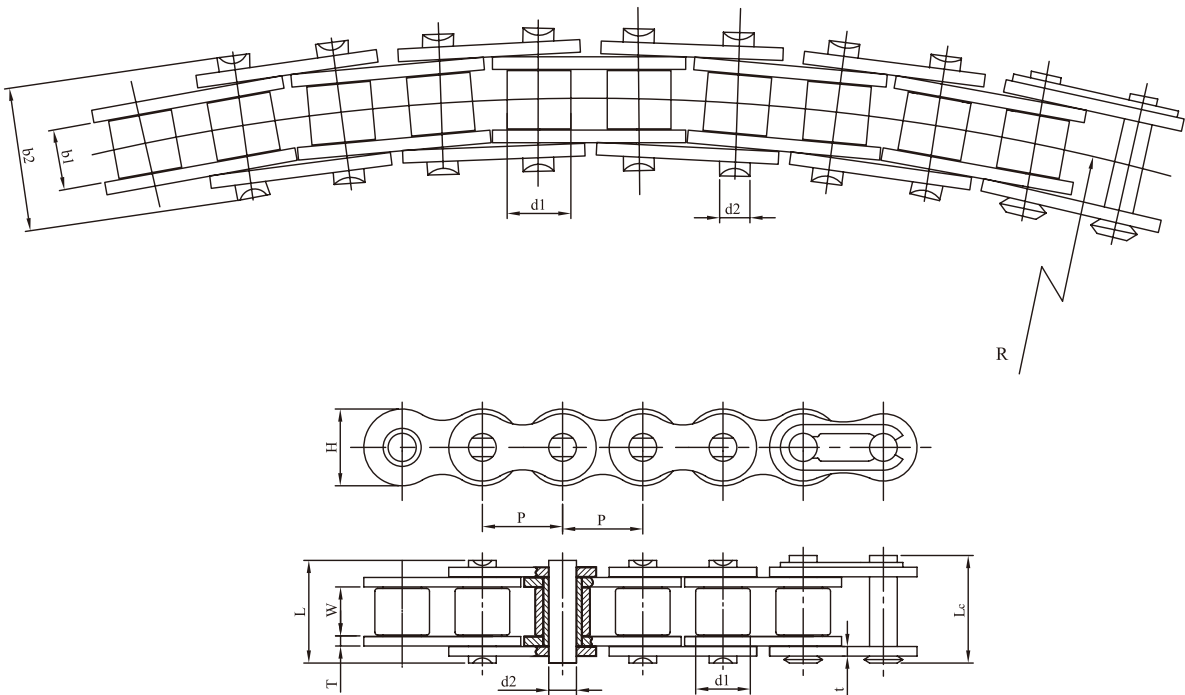

KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Transverse Pitch Of Strand
	P	W min	d1 max	d2 max	L max	Lc max	H max	T/t	min	kgf	Pt
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	mm
40FX	12.70	7.85	7.92	3.98	16.90	18.10	12.0	1.50	350	1420	1600
50FX	15.875	9.40	10.16	5.09	20.70	22.70	15.0	2.00	400	2220	2500
60FX	19.05	12.57	11.91	5.96	26.60	28.40	18.0	2.35	500	3190	3500
80FX	25.40	15.75	15.88	7.94	40.10	43.0	24.10	3.20	600	5680	6300

Stainless Steel Chain


With the same dimensions to short pitch precision roller chain, this kind of chain is made of SUS300 series superior stainless steel, which is excellent in corrosion-resistance, low magnetic and anti-high temperature. Widely used in food processing, drag administration and some other fields. The chain can also be used with attachments, based on your specific requirement.

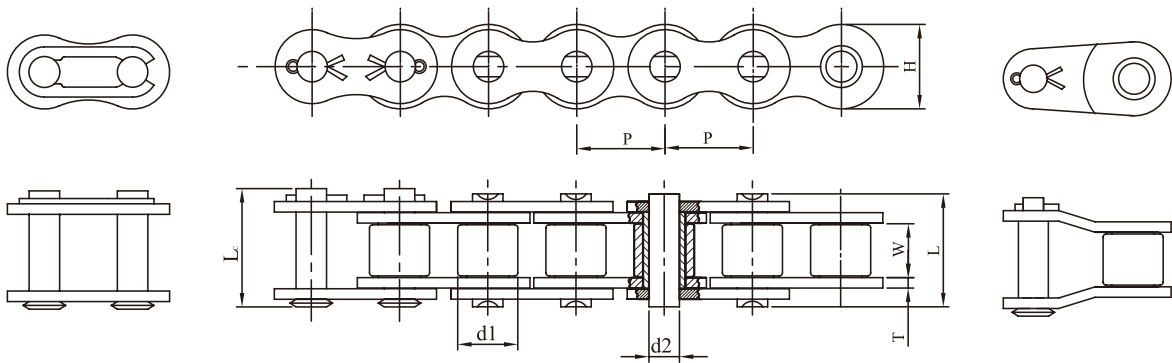

KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength
	P	W min	d1 max	d2 max	L max	Lc max	H max	T/t	min	kgf
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
25SS	6.35	3.10	3.30	2.31	8.0	8.80	6.02	0.75	200	250
35SS	9.525	4.68	5.08	3.60	12.15	13.40	8.80	1.20	550	700
40SS	12.70	7.85	7.92	3.98	17.80	21.0	12.0	1.50	900	1100
50SS	15.875	9.40	10.16	5.09	21.80	25.0	15.0	2.0	1600	1900
60SS	19.05	12.57	11.91	5.96	26.90	31.0	18.0	2.35	2300	2700
80SS	25.40	15.75	15.88	7.94	33.50	38.0	24.10	3.20	4100	4500
06BSS	9.525	5.72	6.35	3.28	13.50	16.80	8.20	1.40/1.10	600	700
08BSS	12.70	7.75	8.51	4.45	17.0	20.70	11.80	1.50	1000	1250
10BSS	15.875	9.65	10.16	5.08	19.60	23.70	14.70	1.70	1300	1800
12BSS	19.05	11.68	12.07	5.72	22.70	27.30	16.10	1.80	1900	2300
16BSS	25.40	17.02	15.88	8.28	36.10	41.50	21.0	4.0/3.0	4100	4900

Stainless Steel Chain


Double strand roller chain

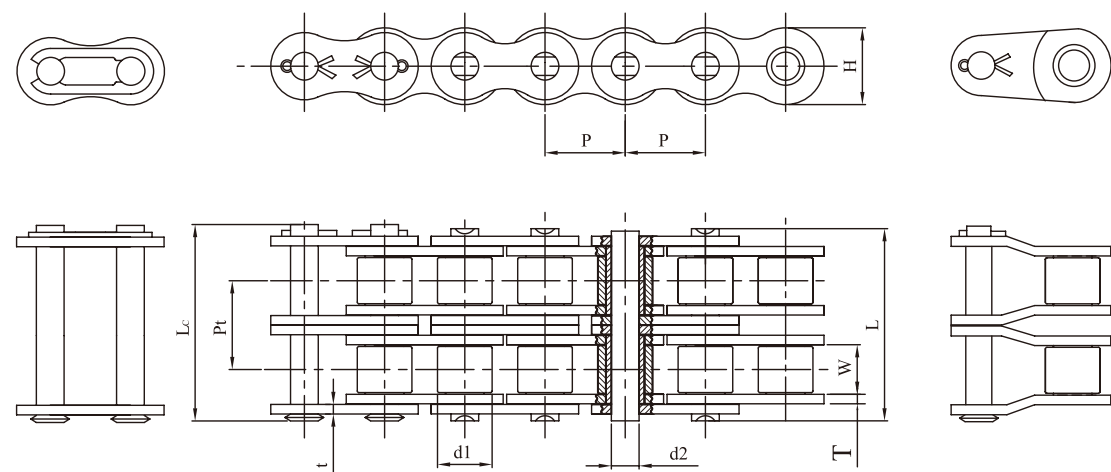

KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Transverse Pitch Of Strand
	P	W min	d1 max	d2 max	L max	Lc max	H max	T/t	min	kgf	Pt
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	mm
40SS-2	12.70	7.85	7.92	3.98	32.30	36.20	12.0	1.50	2000	2500	14.38
50SS-2	15.875	9.40	10.16	5.09	39.90	44.0	15.0	2.0	3600	3800	18.11
60SS-2	19.05	12.58	11.91	5.96	49.80	54.40	18.0	2.35	4800	5300	22.78
80SS-2	25.40	15.75	15.88	7.94	62.70	68.10	24.10	3.20	9000	9160	29.29

Stainless Steel Chain

Double strand roller chain

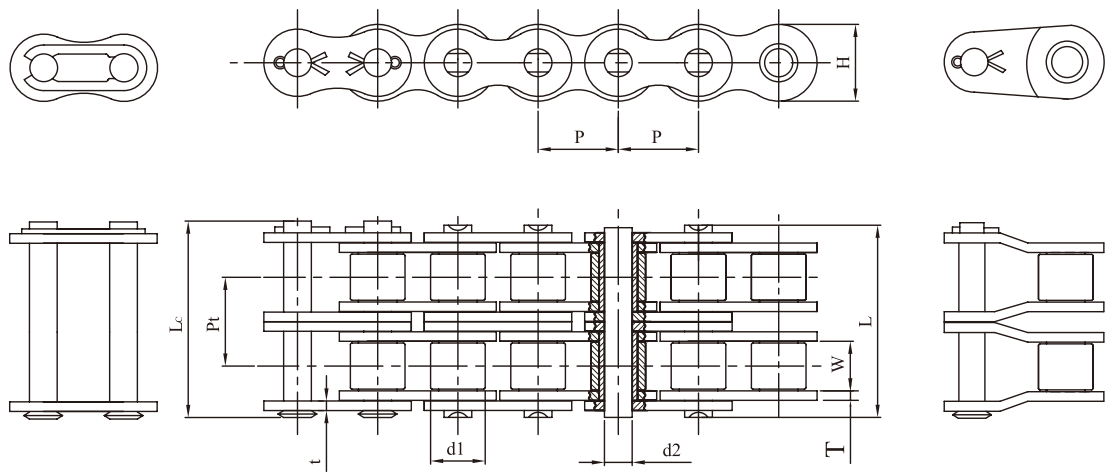

KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Transverse Pitch Of Strand
	P	W min	d1 max	d2 max	L max	Lc max	H max	T/t	min	kgf	Pt
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	mm
06BSS-2	9.525	5.72	6.35	3.28	23.80	27.10	8.20	1.40/1.10	1100	1225	10.24
08BSS-2	12.70	7.75	8.51	4.45	31.0	34.90	11.80	1.50	2200	2580	13.92
10BSS-2	15.875	9.65	10.16	5.08	36.20	40.30	14.70	1.70	3000	3620	16.59
12BSS-2	19.05	11.68	12.07	5.72	42.20	46.80	16.10	1.80	3600	4200	19.46
16BSS-2	25.40	17.02	15.88	8.28	68.0	73.40	21.08	4.0/3.0	8800	9600	31.88


Rust & Corrosion Resistant Series Chain

Their dimensions and performance are similar to standard series since the chain components are under special surface treatment. Which is excellent in corrosion resistance, especial for RB series. The chain is well suited for costal region and other industrial polluted regions.




RB Series

Rust-Resistance Ability

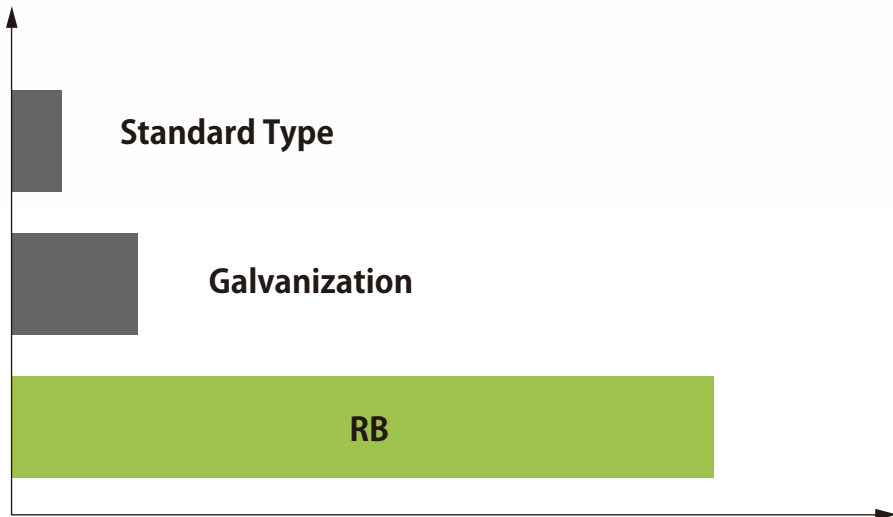


Double Pitch Stainless Steel Conveyor Roller Chain

Strand roller chain

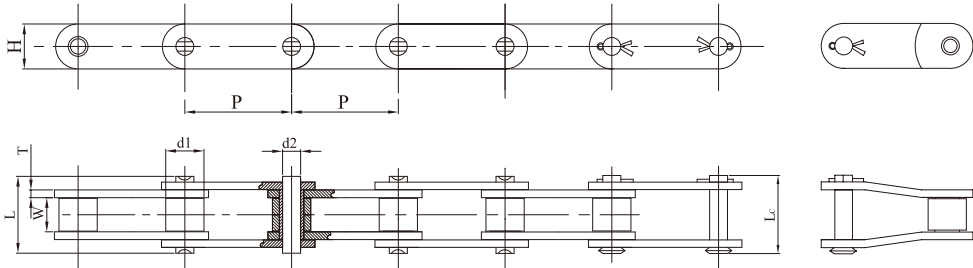


Roller chain with big rollers

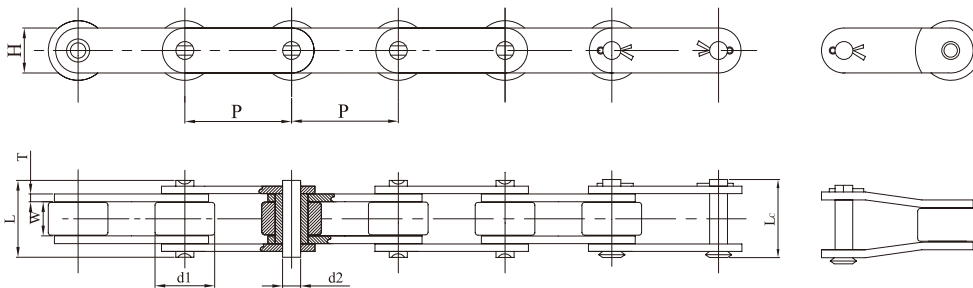

KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength
	P	W min	d1 max	d2 max	L max	Lc max	H max	T	min	
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
C2040SS	25.40	7.85	7.92	3.98	17.80	21.0	12.0	1.50	1000	1250
C2042SS	25.40	7.85	15.88	3.98	17.80	21.0	12.0	1.50	1000	1250
C2050SS	31.75	9.40	10.16	5.09	21.80	25.0	15.0	2.0	1600	1900
C2052SS	31.75	9.40	19.05	5.09	21.80	25.0	15.0	2.0	1600	1900
C2060HSS	38.10	12.57	11.91	5.96	26.90	31.0	18.0	3.20	2600	3100
C2062HSS	38.10	12.57	22.23	5.96	26.90	31.0	18.0	3.20	2600	3100
C2080HSS	50.80	15.75	15.88	7.94	33.50	38.0	24.10	4.0	4700	5400
C2082HSS	50.80	15.75	28.58	7.94	33.50	38.0	24.10	4.0	4700	5400

Car Parking System Series Chain


The series of chains have the same dimensions and configurations with the standard roller chains. By using superior alloy steel material and proceeded with special heat treatment, the chains could have longer wear lives.

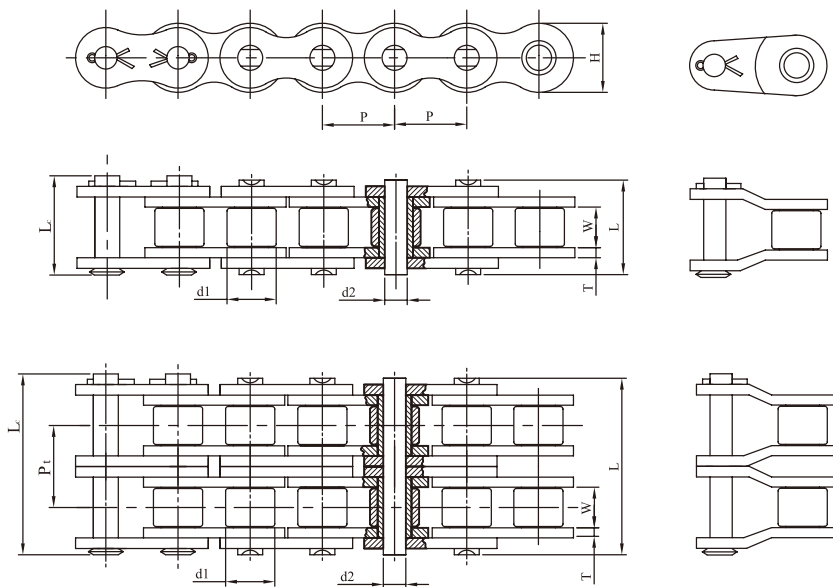

KMC Chain No	Pitch P	Roller Link Width W min	Roller Outer Diameter d1 max	Pin Outer Diameter d2 max	Pin Length		Link Plate Height H max	Link Plate Thickness T	Minimum Tensile Strength min	Average Tensile Strength kgf	Transverse Pitch Of Strand Pt
	mm	mm	mm	mm	L max	Lc max	mm	mm	kgf	kgf	mm
40PE	12.70	7.85	7.92	3.98	17.80	21.0	12.0	1.50	1800	2100	/
50PE	15.875	9.40	10.16	5.09	21.80	25.0	15.0	2.0	2600	3200	/
60PE	19.05	12.57	11.91	5.96	26.90	31.0	18.0	2.35	3600	4500	/
80PE	25.40	15.75	15.88	7.94	33.50	38.0	24.10	3.20	7300	8000	/
100PE	31.75	18.90	19.05	9.54	41.10	47.0	30.10	4.0	11200	13000	/
120PE	38.10	25.22	22.23	11.11	50.80	57.0	36.20	4.70	14500	18000	/
160PE	50.80	31.55	28.58	14.29	65.50	73.0	48.20	6.40	26000	32000	/
80HPE	25.40	15.75	15.88	7.94	37.40	42.80	24.10	4.0	8300	9500	/
120HPE	38.10	25.22	22.23	11.11	55.0	61.60	36.20	5.5	17000	20000	/
140HPE	44.45	25.22	25.40	12.71	59.0	66.40	42.20	6.40	23000	26500	/
160HPE	50.80	31.55	28.58	14.29	69.40	77.30	48.20	7.90	28000	32500	/
60PE-2	19.15	12.57	11.91	5.96	49.80	54.40	18.0	2.35	7200	9000	22.78
80PE-2	25.40	15.75	15.88	7.94	62.70	68.10	24.10	3.20	14600	16000	29.29
100PE-2	31.75	18.90	19.05	9.54	77.0	83.10	30.10	4.0	22400	26000	35.76
120PE-2	38.10	25.22	22.23	11.11	96.30	102.90	36.20	4.70	29000	36000	45.44
140PE-2	44.45	25.22	25.40	12.71	103.60	111.0	42.23	5.50	38000	42000	48.87
160PE-2	50.80	31.55	28.58	14.29	124.20	132.10	48.26	7.90	47000	60000	58.55

O-ring Chain


O-ring chain is specially designed for applications that don't permit regular lubrication, requiring to depend entirely upon initial factory lubrication throughout its service life. The chain can provide up to ten times of the wear life to standard chain. O-ring chain is constructed with O-rings that seal a specially formulated lubricant into every joint. The sealed-in lubricant is essential for the chain's optimum wear life.

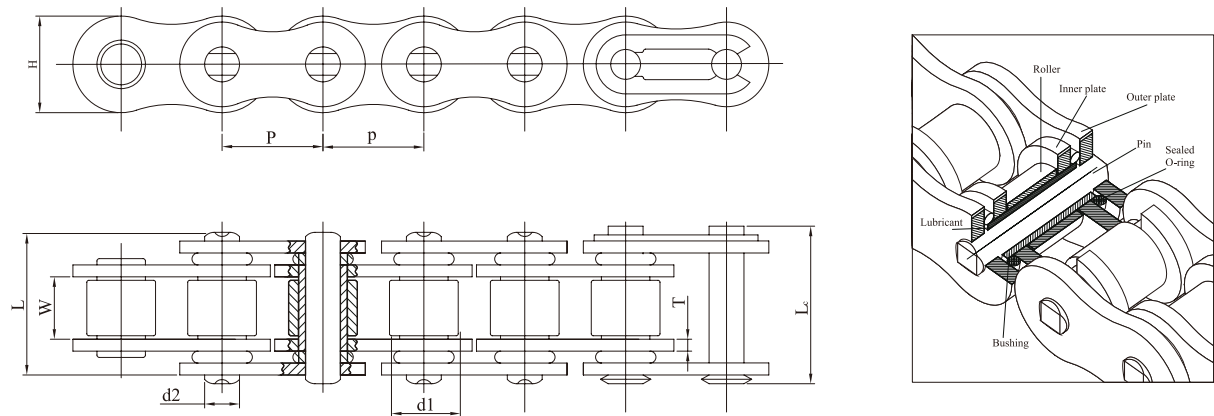

KMC Chain No	Pitch P	Roller Link Width W min	Roller Outer Diameter d2 max	Pin Outer Diameter d2 max	Pin Length		Link Plate Height H max	Link Plate Thickness T/t	Minimum Tensile Strength min	Average Tensile Strength kgf	Allowed Load max
	mm	mm	mm	mm	L max	Lc max	mm	mm	kgf	kgf	kgf
40RO	12.70	7.85	7.92	3.98	19.80	21.80	12.0	1.50	1650	2000	280
50RO	15.875	9.40	10.16	5.09	23.50	25.70	15.0	2.0	2550	3000	440
60RO	19.05	12.57	11.91	5.94	28.80	31.50	17.80	2.35	3600	4200	620
80RO	25.40	15.75	15.88	7.94	40.10	43.0	23.40	3.20	5900	8500	990
08BRO	12.70	7.75	8.51	4.45	19.60	21.60	11.80	1.50	1820	1950	280


Self-Lubrication Roller Chain

Bushings are made of well chosen material, and pins are proceeding with special surface treatment so as to improve the wearing life in the process of operation. The lubrcation to the pin and bushing joint could be regularly maintained.

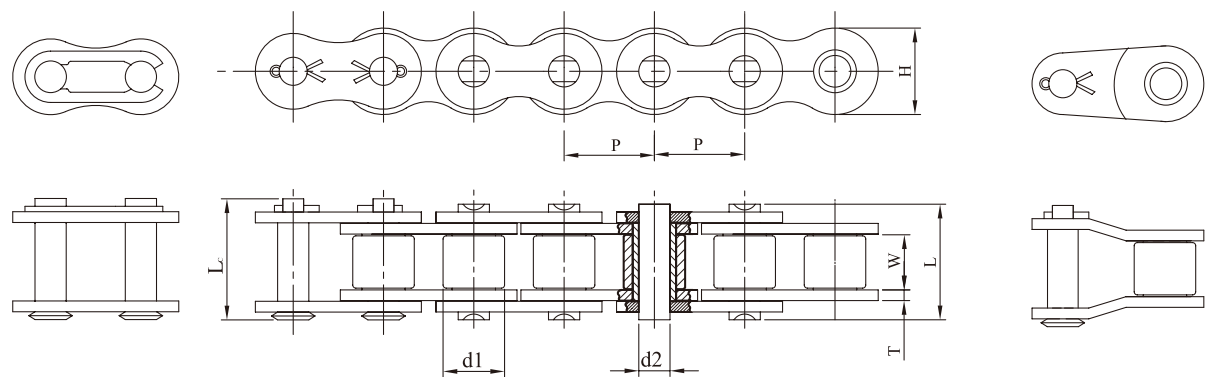

KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness		Minimum Tensile Strength	Average Tensile Strength
	P	W min	d1 max	d2 max	L max	Lc max	H max	T	T1	min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
40PM	12.70	7.85	7.92	3.98	17.80	21.0	12.0	1.50	2.0	1420	1950
50PM	15.875	9.40	10.16	5.09	21.80	25.0	15.0	2.0	2.35	2220	3100
60PM	19.05	12.57	11.91	5.94	26.90	31.0	17.10	2.35	3.20	3190	4400
80PM	25.40	15.88	15.88	7.94	33.50	38.0	24.10	3.20	4.0	5680	7500
60FPM	19.05	12.58	11.91	5.94	26.90	31.0	18.0	2.35	3.20	3190	4400
08BPM	12.70	7.75	8.51	4.45	17.0	20.70	11.80	1.50	1.50	1820	1950
10BPM	15.875	9.65	10.16	5.08	19.60	23.70	14.70	1.70	1.70	2700	2800
12BPM	19.05	11.68	12.07	5.72	22.70	27.30	16.10	1.80	1.80	2950	3250
16BPM	25.40	17.02	15.88	8.28	36.10	41.50	21.0	3.0	3.0/4.0	6130	7600


Free Flow Chain

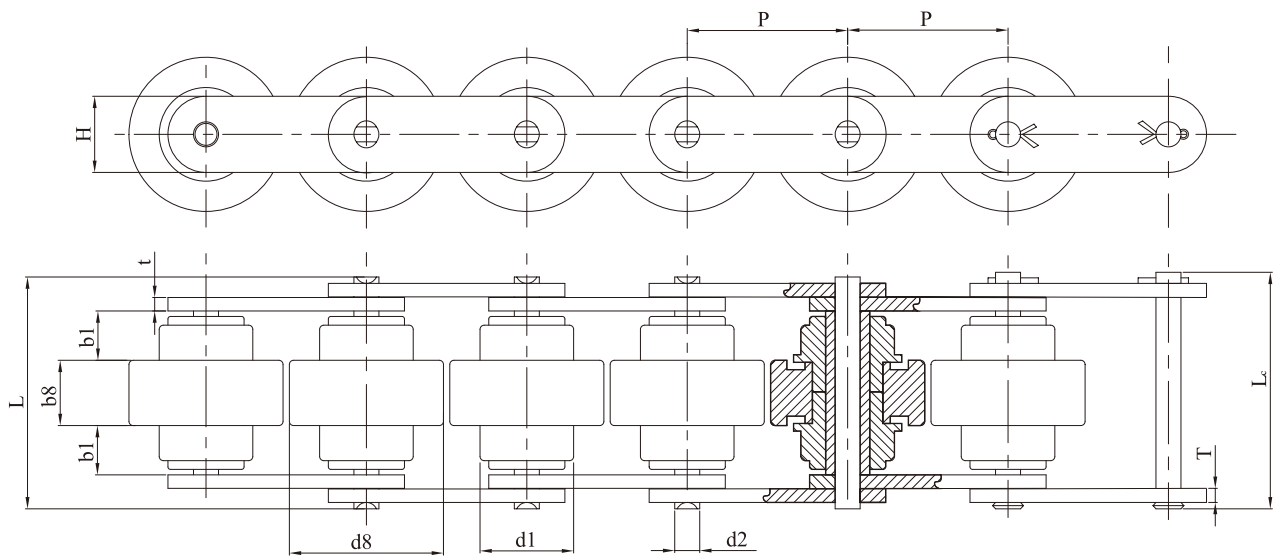

GB/JB Chain No	KMC Chain No	Pitch		Roller Diameter			Pin Diameter		Pin Length			
		P	d1 max	d8 max	b1 max	b8 max	d2 max	L max	Lc max	H max	T max	t max
		mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
BS30-C212A	C2060T	38.10	18.0	38.0	9.57	20.0	5.94	58.10	62.70	15.0	3.20	4.0

Note:
The big rollers is plastic material.


Free Flow Chain

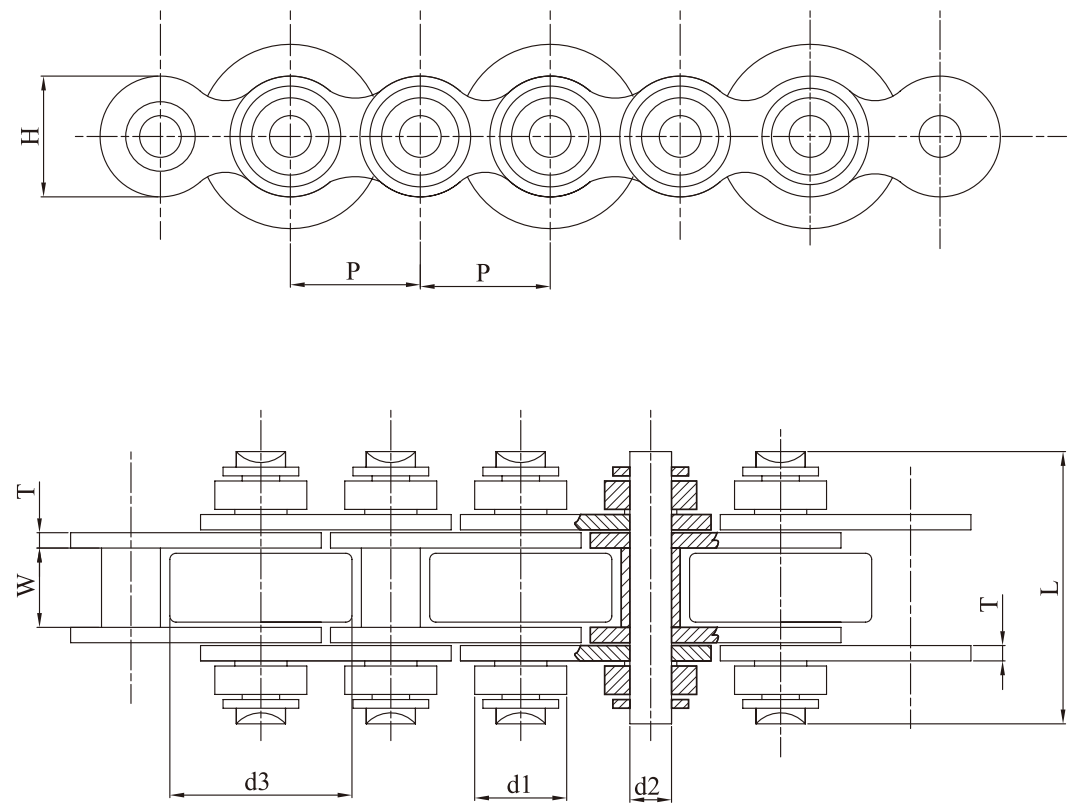

KMC Chain No	Pitch	Roller Outer Diameter		Roller Link Width	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength
	P	d1 max	d2 max	W min	d2 max	L max	H max	T		min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
462SF	12.70	8.50	18.0	7.75	4.45	27.20	11.80	1.50		1820	1950
548SF	25.40	15.86	38.45	15.75	8.28	65.20	30.10	4.0/3.0		6130	7500

Side-Roller Chain

Side Rollers

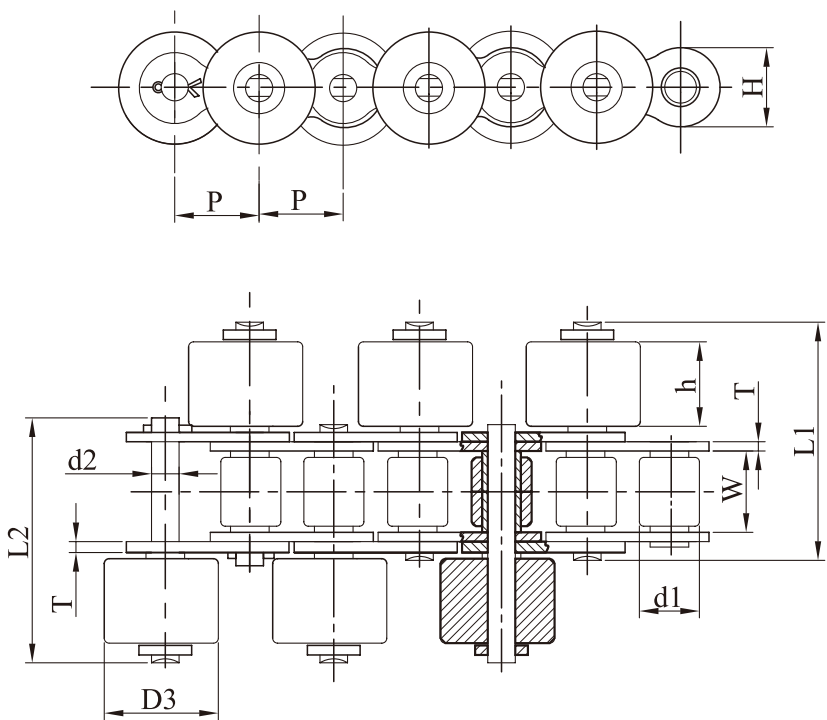


KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length				Sprocket Dimension	Sprocket Height	Link Plate Height	Link Thickness Plate	Minimum Tensile Strength	Tensile Strength Average	Allowed Load
	P	W min	d1 max	d2 max	L1 max	L2 max	L3 max	L4 max	D3	h	H max	T	min		max
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	
40-PSR	12.70	7.85	7.92	3.98	25.80	27.70	35.30	37.20	15.88	7.80	12.0	1.50	1700	1600	272
40-SSR															
50-PSR	15.875	9.40	10.16	5.09	31.20	33.70	42.30	44.80	19.05	9.40	15.0	2.0	2800	2710	461
50-SSR															
60-PSR	19.05	12.57	11.91	5.94	39.45	41.80	55.95	58.30	24.0	12.60	18.0	2.35	3800	3200	544
60-SSR															
80-PSR	25.40	15.75	15.87	7.94	50.90	54.30	69.60	73.0	28.58	15.70	24.1	3.20	8000	7300	1241
80-SSR															

Note:


1. SSR stands for Carbon Material of the Side Rollers
2. PSR stands for Plastic Material of the Side Rollers

Double Pitch Side-Roller Chain

SG Side Rollers

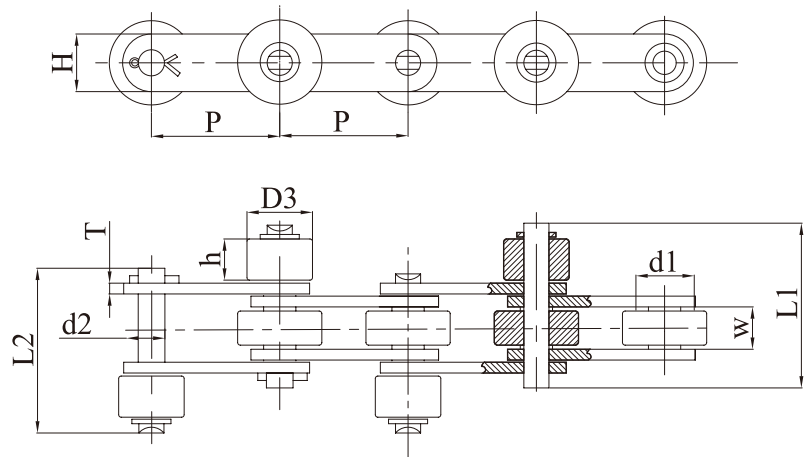

SR Parallel Type

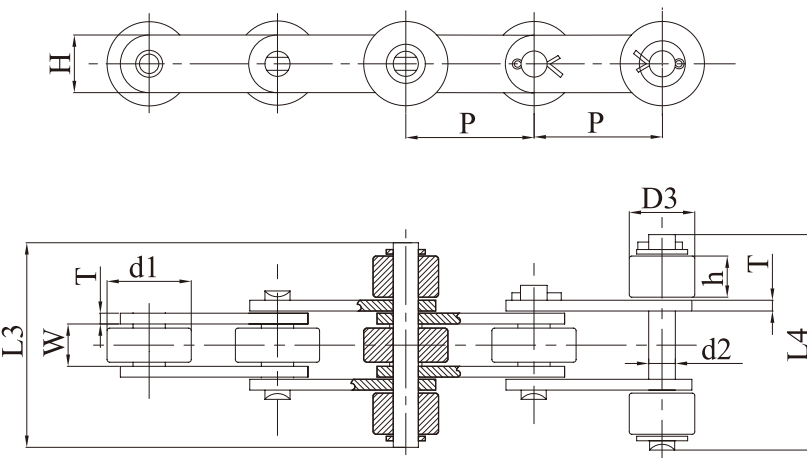


KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length				Sprocket Dimension	Sprocket Dimension	Link Plate Height	Link Plate Thickness
	P	W min	d1 max	d2 max	L1 max	L2 max	L3 max	L4 max	D3	h	H max	T
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf
C2060H-SG-SSR	38.10	12.57	11.91	5.96	43.90	46.30	58.50	60.90	22.23	12.60	18.0	3.20
C2062H-SG-SSR			22.23						30.0			
C2080H-SG-SSR	50.80	15.75	15.88	7.94	54.20	57.40	72.20	75.40	28.50	15.70	24.10	4.00
C2082H-SG-SSR			25.58						38.10			

Note:


1. SSR stands for Carbon Material of the Side Rollers
2. PSR stands for Plastic Material of the Side Rollers

Lumber Conveyor Chain

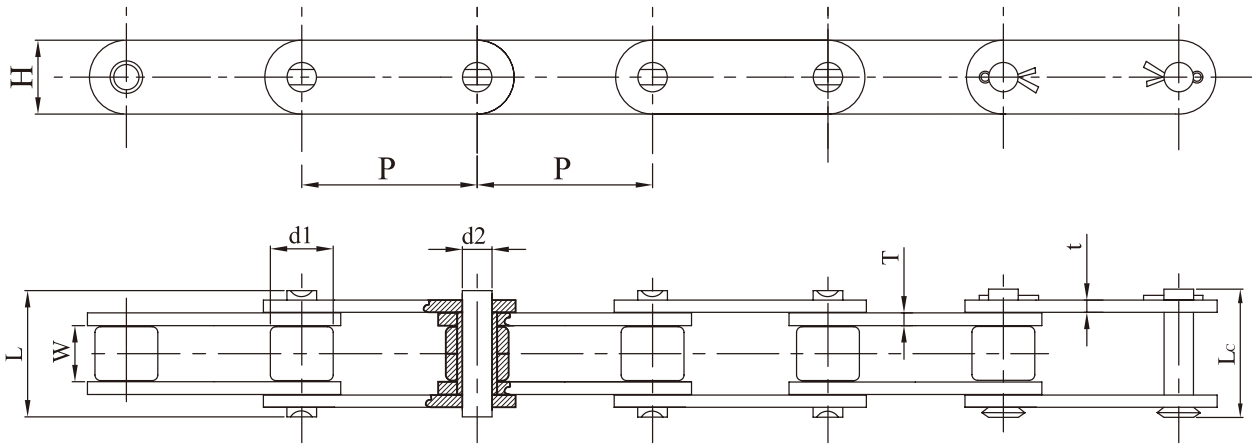


KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Minimum Tensile Strength	Average Tensile Strength	Allowed Load
	P	W min	d2 max	d2 max	L max	Lc max	H max	T/t	min		max
	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	kgf
81X	66.27	27.0	23.0	11.12	49.0	53.50	28.50	4.0	10900	6000	1850
81XH	66.27	27.78	23.0	11.12	60.70	65.10	31.35	7.70/6.0	15500	12000	2250
81XHH	66.27	27.78	23.0	11.12	65.60	70.0	31.35	7.70	19500	23000	3400

Leaf Chain

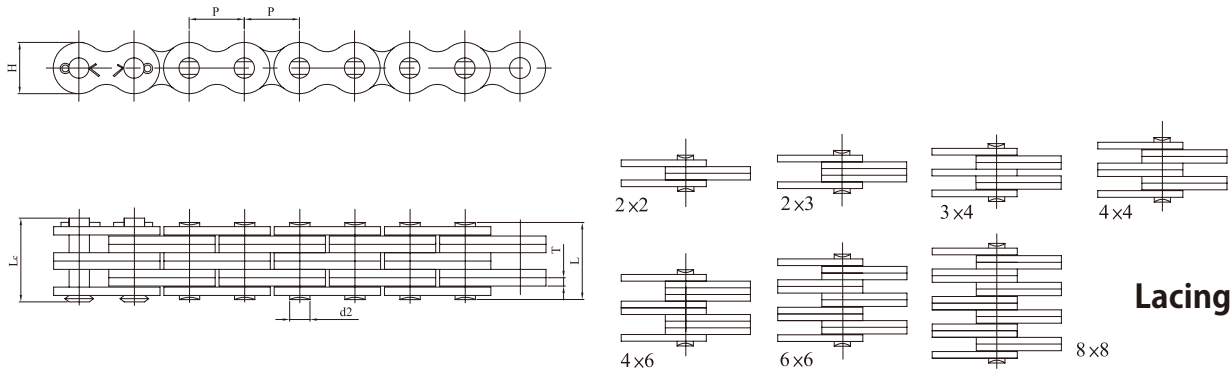


ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Lacing	Link Plate Height	Link Plate Thickness	Pin Outer Diameter	Pin Length	Minimum Tensile Strength	Average Tensile Strength	Allowed Load
			P		H max	T max	d2 max	L max	min	kgf	max
			mm		mm	mm	mm	mm	kgf	kgf	kgf
LH1022	BL522	BL522	15.875	2x2	15.09	2.4	5.96	12.9	3410	4450	700
LH1023	BL523	BL523	15.875	2x3	15.09	2.4	5.96	15.3	3410	4450	700
LH1034	BL534	BL534	15.875	3x4	15.09	2.4	5.96	20.3	5000	6550	850
LH1044	BL544	BL544	15.875	4x4	15.09	2.4	5.96	22.6	6810	8700	960
LH1046	BL546	BL546	15.875	4x6	15.09	2.4	5.96	27.6	6810	8700	960
LH1066	BL566	BL566	15.875	6x6	15.09	2.4	5.96	32.6	10220	12900	1650
LH1088	BL588	BL588	15.875	8x8	15.09	2.4	5.96	42.5	13620	17350	2300
LH1222	BL622	BL622	19.05	2x2	18.11	3.2	7.94	17.3	5000	6450	1000
LH1223	BL623	BL623	19.05	2x3	18.11	3.2	7.94	20.7	5000	6450	1000
LH1234	BL634	BL634	19.05	3x4	18.11	3.2	7.94	27.4	7720	10622	1250
LH1244	BL644	BL644	19.05	4x4	18.11	3.2	7.94	30.7	12400	12633	1400
LH1246	BL646	BL646	19.05	4x6	18.11	3.2	7.94	37.4	12400	12633	1400

Leaf Chain

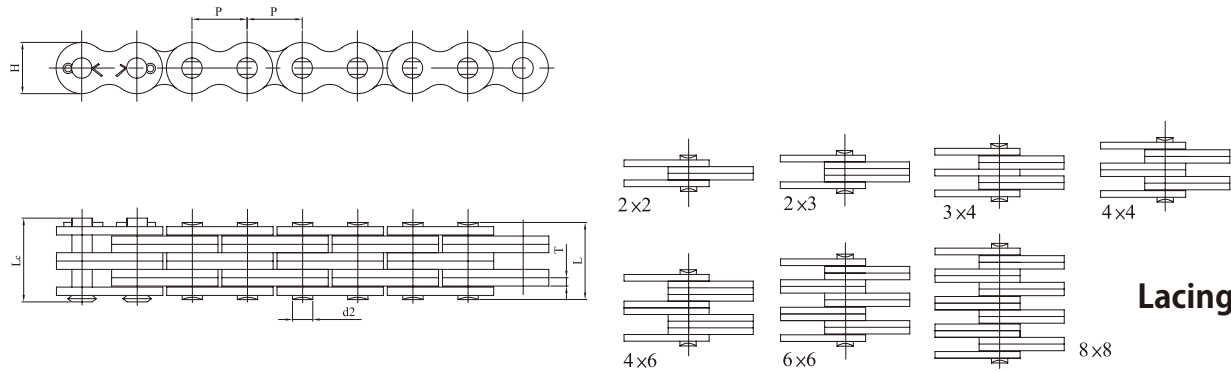


ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Lacing	Link Plate Height	Link Plate Thickness	Pin Outer Diameter	Pin Length	Minimum Tensile Strength	Average Tensile Strength	Allowed Load
			P		H max	T max	d2 max	L max	min	kgf	max
			mm		mm	mm	mm	mm	kgf	kgf	kgf
LH1266	BL666	BL666	19.05	6x6	18.1	3.2	7.94	44.2	14980	19500	2500
LH1288	BL688	BL688	19.05	8x8	18.1	3.2	7.94	57.6	20000	25000	3200
LH1622	BL822	BL822	25.4	2x2	24.1	4.0	9.54	21.3	8630	11050	1750
LH1623	BL823	BL823	25.4	2x3	24.1	4.0	9.54	25.4	8630	11050	1750
LH1634	BL834	BL834	25.4	3x4	24.1	4.0	9.54	33.7	13170	17500	2100
LH1644	BL844	BL844	25.4	4x4	24.1	4.0	9.54	37.8	17250	21950	2400
LH1646	BL846	BL846	25.4	4x6	24.1	4.0	9.54	46.1	17250	21950	2400
LH1666	BL866	BL866	25.4	6x6	24.1	4.0	9.54	54.4	25880	33500	4250
LH2022	BL1022	BL1022	31.75	2x2	30.1	4.7	11.11	25.3	11800	15500	2650
LH2023	BL1023	BL1023	31.75	2x3	30.1	4.7	11.11	30.3	11800	15500	2650
LH2034	BL1034	BL1034	31.75	3x4	30.1	4.7	11.11	40.2	18650	24000	3200
LH2044	BL1044	BL1044	31.75	4x4	30.1	4.7	11.11	45.1	23610	30000	3700
LH2046	BL1046	BL1046	31.75	4x6	30.1	4.7	11.11	55.0	23610	30000	3700
LH2066	BL1066	BL1066	31.75	6x6	30.1	4.7	11.11	64.9	35410	43950	6050
LH2422	BL1222	BL1222	38.1	2x2	36.2	5.6	12.71	29.5	15440	19800	3750

Leaf Chain

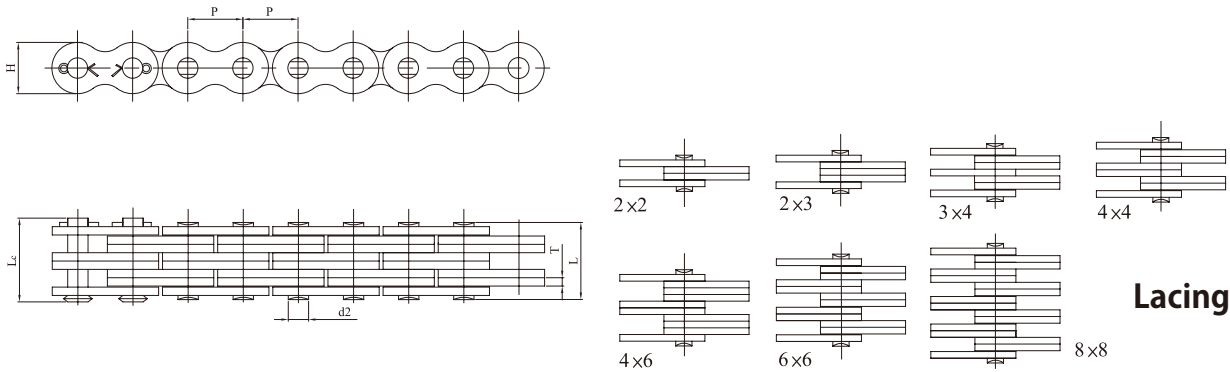

ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Lacing	Link Plate Height	Link Plate Thickness	Pin Outer Diameter	Pin Length	Minimum Tensile Strength	Average Tensile Strength	Allowed Load
			P		H max	T max	d2 max	L max	min	kgf	max
			mm		mm	mm	mm	mm	kgf	kgf	kgf
LH2423	BL1223	BL1223	38.1	2x3	36.2	5.6	12.71	35.4	15440	19800	3750
LH2434	BL1234	BL1234	38.1	3x4	36.2	5.6	12.71	47.0	24970	32500	4500
LH2444	BL1244	BL1244	38.1	4x4	36.2	5.6	12.71	52.8	30870	40000	5200
LH2446	BL1246	BL1246	38.1	4x6	36.2	5.6	12.71	64.4	30870	40000	5200
LH2466	BL1266	BL1266	38.1	6x6	36.2	5.6	12.71	76.0	54000	56000	7750
LH2834	BL1434	BL1434	44.45	3x4	42.24	6.4	14.29	53.3	32230	38100	6000
LH2844	BL1444	BL1444	44.45	4x4	42.24	6.4	14.29	59.9	39040	43000	6900
LH2888	BL1488	BL1488	44.45	8x8	42.24	6.4	14.29	112.7	78070	93000	12900
LH3288	BL1688	BL1688	50.8	8x8	48.26	7.0	17.46	129.8	118010	140000	17500
LH3222	BL1622	BL1622	50.8	2x2	48.26	7.0	17.46	39	29510	34800	6000
LH3223	BL1623	BL1623	50.8	2x3	48.26	7.0	17.46	46.6	29510	34800	6000
LH3234	BL1634	BL1634	50.8	3x4	48.26	7.0	17.46	61.7	44350	54000	7200
LH3244	BL1644	BL1644	50.8	4x4	48.26	7.0	17.46	69.2	59010	70500	8200
LH3246	BL1646	BL1646	50.8	4x6	48.26	7.0	17.46	84.4	59010	70500	8200
LH3266	BL1666	BL1666	50.8	6x6	48.26	7.0	17.46	99.5	88510	105200	13000


Leaf Chain

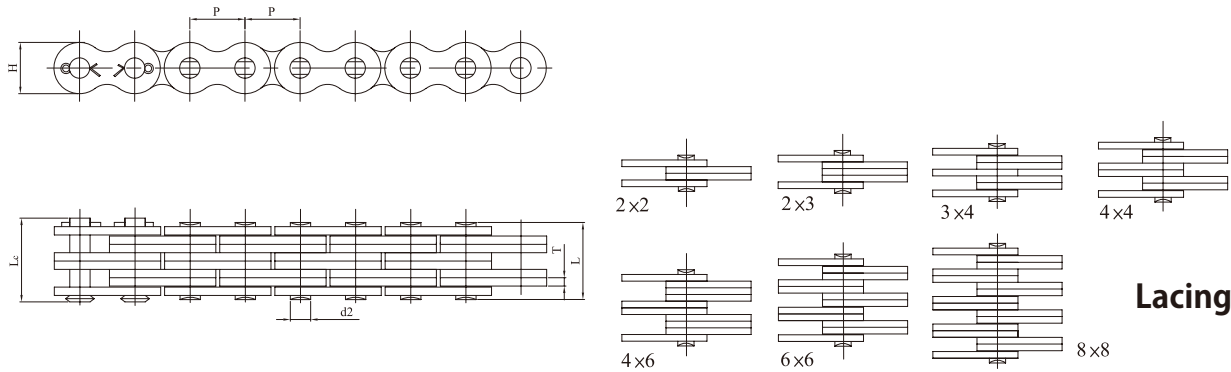


KMC Chain No	Pitch	Lacing	Link Plate Height	Link Plate Thickness	Pin Outer Diameter	Pin Length	Minimum Tensile Strength	Average Tensile Strength	Allowed Load
	P		H max	T max	d2 max	L max	min	kgf	max
	mm		mm	mm	mm	mm	kgf	kgf	kgf
AL422	12.70	2x2	12.92	1.50	3.98	8.60	1850	1915	210
AL423	12.70	2x3	12.92	1.50	3.98	9.70	1850	1880	206
AL434	12.70	3x4	12.92	1.50	3.98	12.75	2800	2810	309
AL444	12.70	4x4	12.92	1.50	3.98	14.90	3700	3770	414
AL446	12.70	4x6	12.92	1.50	3.98	17.60	3700	3730	410
AL466	12.70	6x6	12.92	1.50	5.09	20.60	5510	5660	622
AL522	15.875	2x2	13.72	2.00	5.09	11.05	2200	3000	330
AL523	15.875	2x3	13.72	2.00	5.09	13.10	2200	3000	330
AL544	15.875	4x4	13.72	2.00	5.09	19.40	4500	6050	675
AL566	15.875	6x6	13.72	2.00	5.09	27.50	6700	9000	1000
AL622	19.05	2x2	16.13	2.35	5.96	13.00	3250	4250	506
AL623	19.05	2x3	16.13	2.35	5.96	15.50	4060	4350	506
AL644	19.05	4x4	16.13	2.35	5.96	22.70	6500	8550	975
AL666	19.05	6x6	16.13	2.35	5.96	32.20	10250	12500	1530
AL688	19.05	8x8	16.13	2.35	5.96	42.20	13000	15600	2040
AL844	25.40	4x4	21.08	3.20	7.94	29.40	12000	15000	1800
AL866	25.40	6x6	21.08	3.20	7.94	44.20	18000	24000	2700
AL888	25.40	8x8	21.08	3.20	7.94	56.50	24000	30000	3600

Extended Pin Roller Chain

D1

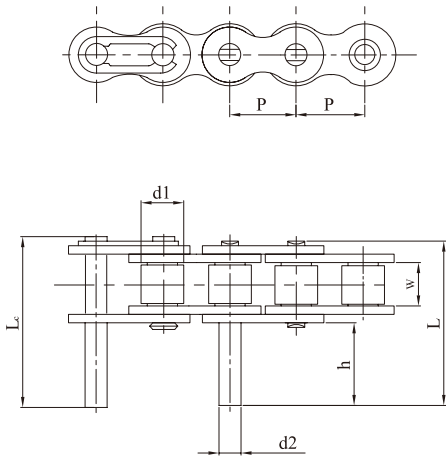


D3

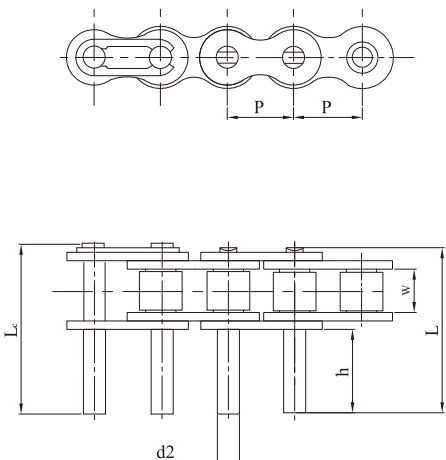


ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Height Of Extended Pin
			P	W min	d1 max	d2 max	L max	Lc max	h
			mm	mm	mm	mm	mm	mm	mm
04C	25	25	6.35	3.10	3.30	2.31	10.20	11.10	2.8
							20.90	21.80	13.5
06C	35	35	9.525	4.68	5.08	3.60	14.05	15.05	3.0
							16.00	17.00	5.0
							18.00	18.95	7.0
							14.60	15.60	3.4
							15.00	16.00	3.8
							15.80	16.80	4.6
							18.20	19.20	7.0
							20.80	21.60	9.5
08A	40	40	12.70	7.85	7.92	3.98	21.00	22.05	10.0
							26.00	27.05	15.0
							25.15	26.20	9.50
							31.10	32.25	15.40
10A	50	50	15.875	9.40	10.16	5.09	31.30	33.10	11.90
							38.35	39.60	19.05
12A	60	60	19.05	12.57	11.91	5.96	38.60	40.60	14.30
16A	80	80	25.40	15.75	15.88	7.94	50.30	53.30	19.10
20A	100	100	31.75	18.90	19.05	9.54	61.80	66.10	23.80

Extended Pin Roller Chain

D1

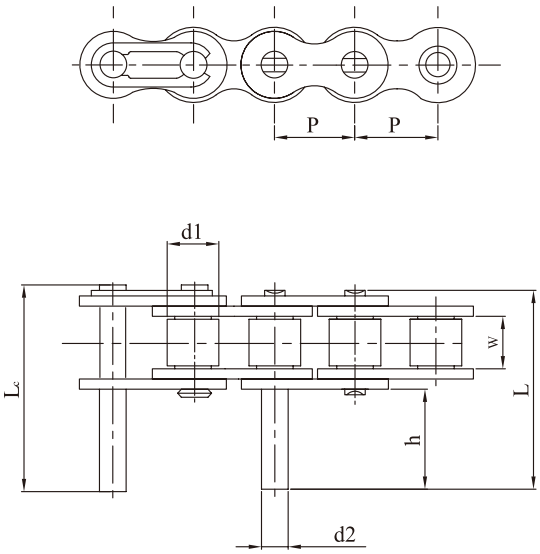


D3

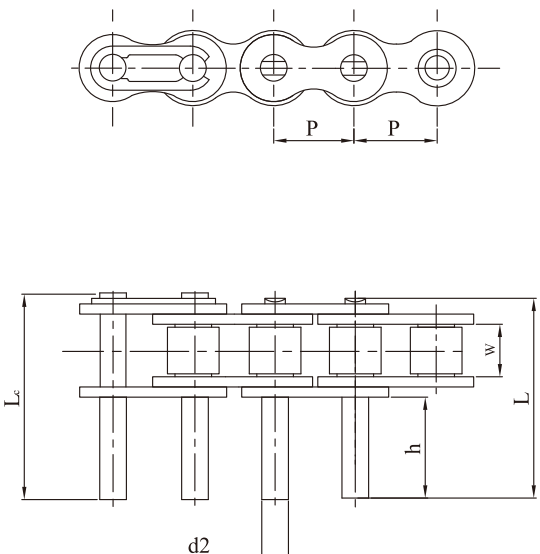


KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Height Of Extended Pin
	P	W min	d1 max	d2 max	L max	Lc max	h
	mm	mm	mm	mm	mm	mm	mm
05B	8.00	3.00	5.00	2.31	10.40	11.10	3.00
					10.90	11.60	3.50
					12.40	13.10	5.00
					14.40	15.10	7.00
08B	12.70	7.75	8.51	4.45	25.10	26.60	9.5
10B	15.875	9.65	10.16	50.8	30.10	31.50	11.9
12B	19.05	11.68	12.07	5.72	35.40	37.10	14.3
16B	25.40	17.02	15.88	8.28	53.00	54.30	19.1
35SS	9.525	4.68	5.08	3.60	11.60	12.60	3.0
40SS	12.70	7.85	7.92	3.98	19.65	21.10	3.0
					20.65	22.10	5.0

Double Pitch Extended Pin Roller Chain

D1

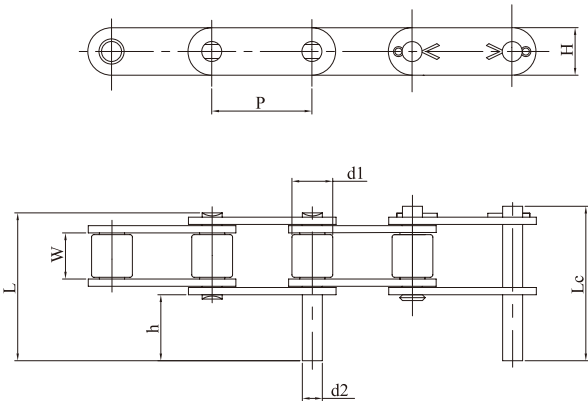


D3

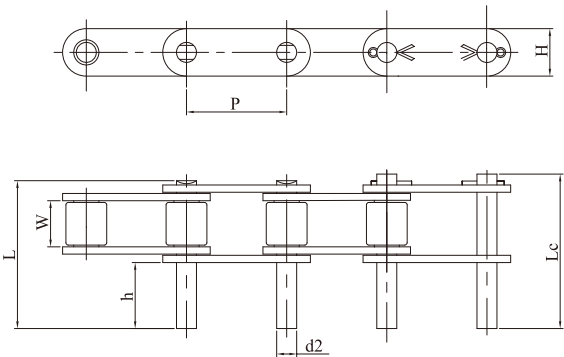


ISO Chain NO	ANSI Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Height Of Extended Pin	Link Plate Height
			P	W min	d1 max	d2 max	L max	Lc max	h	H max
			mm	mm	mm	mm	mm	mm	mm	mm
C208A	C2040	C2040	25.4	7.85	7.92	3.98	25.1	26.2	9.5	12.0
C208AL	C2042	C2042	25.4	7.85	15.88	3.98	25.1	26.2	9.5	12.0
C210A	C2050	C2050	31.75	9.4	10.16	5.09	31.3	33.1	11.9	15.0
C210AL	C2052	C2052	31.75	9.4	19.05	5.09	31.3	33.1	11.9	15.0
C212AH	C2060H	C2060H	38.1	12.57	11.91	5.96	42	43.8	14.3	18.0
C212AHL	C2062H	C2062H	38.1	12.57	22.23	5.96	42	43.8	14.3	18.0
C216HL	C2080H	C2080H	50.8	15.75	15.88	7.94	53.5	55	19.1	24.1
C216AHL	C20802H	C2082H	50.8	15.75	28.58	7.94	53.5	55	19.1	24.1

Double Pitch Extended Pin Roller Chain

D5

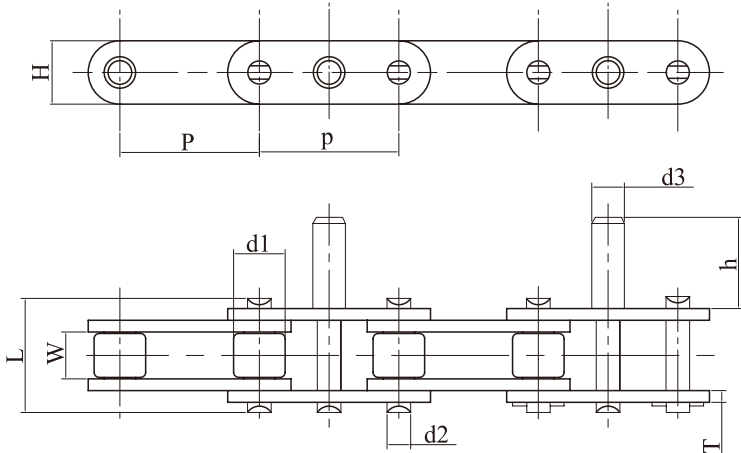


2D5

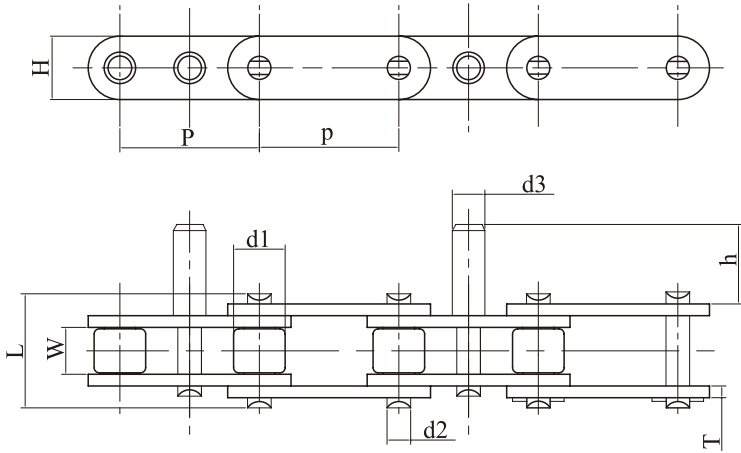


KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length	Link Plate Height	Link Plate Thickness	Height Of Extended Pin	Extending Pin Diameter
	P	W min	d1 max	d2 max	L max	H max	h	h	d3
	mm	mm	mm	mm	mm	mm	mm	mm	mm
C2060H-D5	38.10	12.57	11.91	5.96	30.20	17.30	3.20	41.20	12.70
								41.30	17.70
C2060H2D5-1/1/2"	38.10	12.57	11.91	5.96	30.20	17.30	3.20	41.20	12.70
C2060H2D5-9/16"	38.10	12.57	11.91	5.96	30.20	17.30	3.20	41.20	14.30

Standard Roller Chain Attachments

SA-1

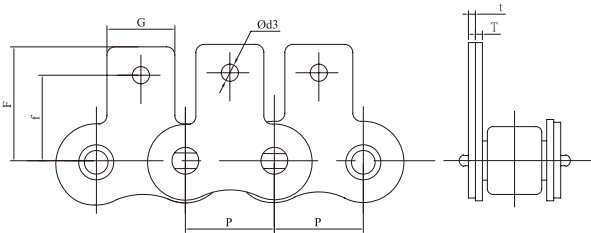


SK-1

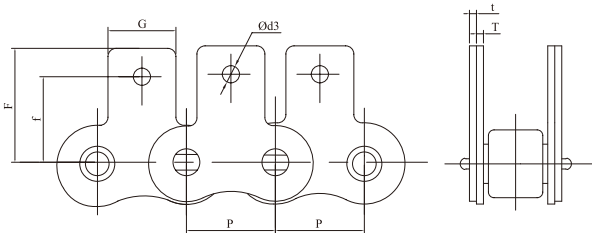


ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Link Plate Thickness	Attachment Dimension			
			P	T/t	G	F	f	d3
			mm	mm	mm	mm	mm	mm
08A	40	40	12.70	1.50	9.50	17.50	12.70	3.60
10A	50	50	15.875	2.00	12.70	22.60	15.88	5.20
12A	60	60	19.05	2.35	15.90	26.20	18.26	5.20
16A	80	80	25.40	3.20	19.05	34.00	24.60	6.80
20A	100	100	31.75	4.00	25.40	44.00	31.80	8.70
24A	120	120	38.10	4.70	28.60	51.60	36.50	9.80
06B		06B	9.525	1.4/1.1	8.00	13.50	9.52	3.50
08B		08B	12.70	1.50	9.50	18.90	13.00	4.50
10B		10B	15.875	1.70	14.30	22.95	16.50	5.30
12B		12B	19.05	1.80	16.00	28.60	21.00	6.40
16B		16B	25.40	4.0/3.0	19.10	34.00	23.00	6.40

Standard Roller Chain Attachments

A-1

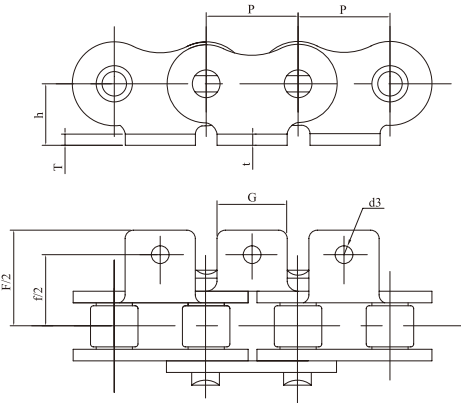


K-1

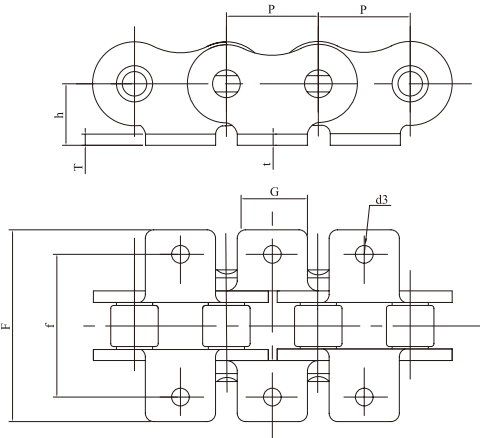


ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Link Plate Thickness	Attachment Dimension				
			P	T/t	G	F	f	d3	h
			mm	mm	mm	mm	mm	mm	mm
08A	40	40	12.70	1.50	9.50	35.00	25.40	3.60	7.92
10A	50	50	15.875	2.00	12.70	45.20	31.76	5.20	10.30
12A	60	60	19.05	2.35	15.90	54.00	38.10	5.20	11.90
16A	80	80	25.40	3.20	19.05	69.60	50.80	6.80	15.90
20A	100	100	31.75	4.0	25.40	90.76	63.50	8.70	19.80
24A	120	120	38.10	4.70	28.60	108.50	76.20	9.80	23.00
06B		06B	9.525	1.4/1.1	8.00	27.00	19.04	3.50	6.50
08B		08B	12.70	1.50	9.50	36.40	25.40	4.30	8.90
10B		10B	15.875	1.70	14.30	44.60	31.80	5.30	10.30
12B		12B	19.05	1.80	16.00	52.20	38.10	6.40	13.50
16B		16B	25.40	4.0/3.0	19.10	72.60	50.80	6.40	15.90

Standard Roller Chain Attachments

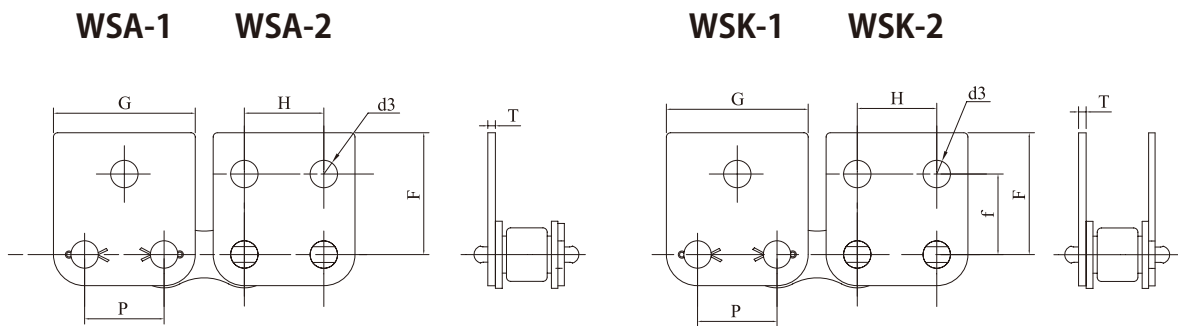

ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Link Plate Thickness	Attachment Dimension				
			P	T	G	H	f	F	d3
			mm	mm	mm	mm	mm	mm	mm
06C	35	35	9.525	1.15	17.32	9.52	9.52	14.55	2.80
08A	40	40	12.70	1.50	22.90	12.70	12.70	17.40	3.40
10A	50	50	15.875	2.00	28.85	15.88	15.90	23.05	5.50
12A	60	60	19.05	2.35	34.20	19.05	18.30	28.20	6.60
16A	80	80	25.40	3.20	46.00	25.40	24.60	34.25	6.80
20A	100	100	31.75	4.00	61.80	31.75	31.80	47.00	8.50
24A	120	120	38.10	4.70	69.30	38.10	36.50	51.60	9.80
08B		08B	12.70	1.50	23.30	12.70	13.00	18.90	4.30
10B		10B	15.875	1.70	29.58	15.88	16.50	22.95	5.30
12B		12B	19.05	1.80	36.07	19.05	18.18	26.34	6.50
16B		16B	25.40	3.00	46.40	25.40	23.00	34.00	6.40
20B		20B	31.75	3.50	58.10	31.75	30.50	45.70	8.40


Standard Roller Chain Attachments

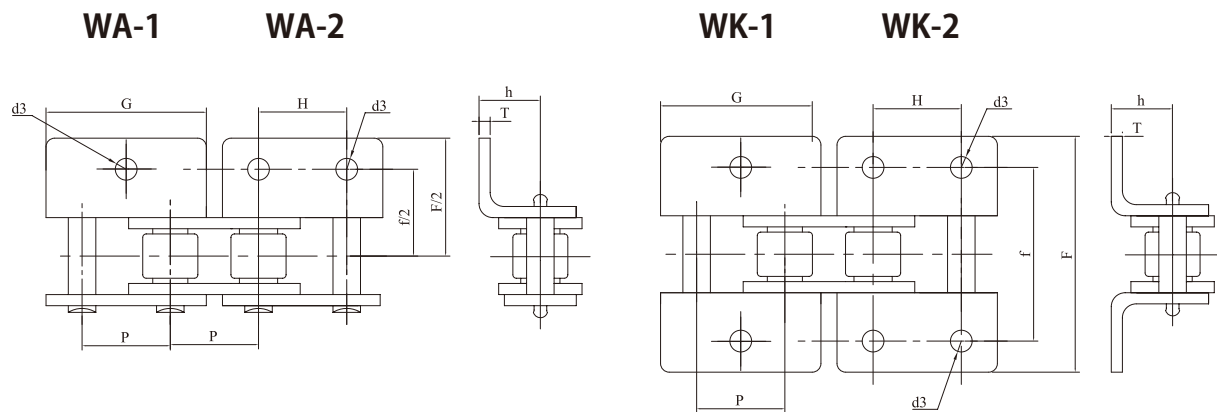


ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Link Plate Thickness	Attachment Dimension					
			P	T	G	H	f	F	d3	h
			mm	mm	mm	mm	mm	mm	mm	mm
06C	35	35	9.525	1.30	17.32	9.52	19.04	28.60	2.80	6.40
08A	40	40	12.70	1.50	22.90	12.70	25.40	35.60	3.40	7.9
10A	50	50	15.875	2.03	28.85	15.88	31.80	46.80	5.50	10.3
12A	60	60	19.05	2.42	36.00	19.05	38.10	56.40	6.60	11.9
16A	80	80	25.40	3.25	46.00	25.40	50.80	69.30	6.80	15.88
20A	100	100	31.75	4.00	57.65	31.75	63.50	89.80	8.70	19.8
24A	120	120	38.10	4.80	69.30	38.10	76.20	108.80	9.80	23
08B		08B	12.70	1.50	24.30	12.70	28.00	36.40	4.30	8.9
10B		10B	15.875	1.70	29.58	15.88	31.76	44.60	5.30	10.30
12B		12B	19.05	1.80	34.05	19.05	38.10	52.40	6.40	13.50
16B		16B	25.40	3.00	46.40	25.40	50.80	72.60	6.40	15.90

Double Pitch Conveyor Chain Attachments


SA-1

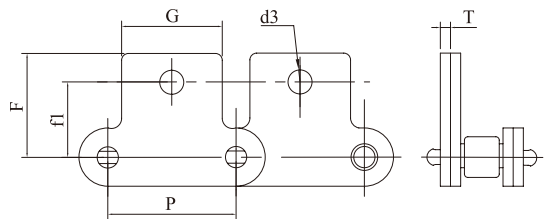


SK-1

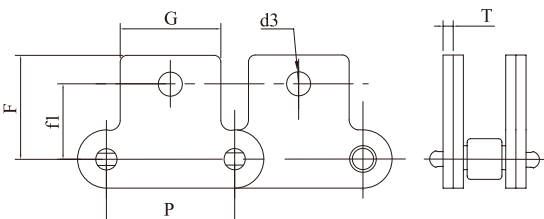

SA-2

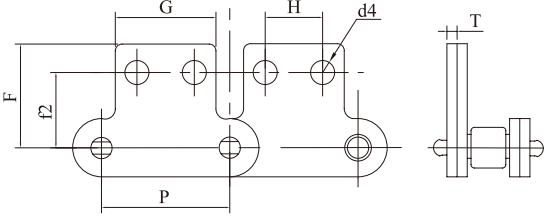


SK-2

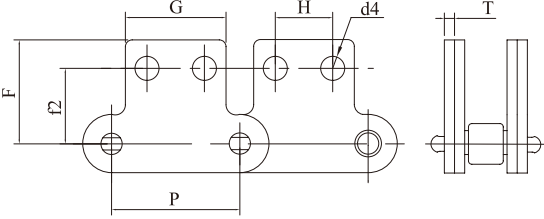


ISO Chain No	ANSI Chain No	KMC Chain No	Pitch		Link Plate Thickness	Attachment Dimension					
			P	T		G	H	f1	f2	F	d4
			mm	mm		mm	mm	mm	mm	mm	mm
C208A	C2040	C2040	25.40	1.50	19.10	9.52	11.10	13.50	19.80	3.60	5.20
C208AL	C2042	C2042									
C210A	C2050	C2050	31.75	2.00	23.80	11.91	14.25	15.88	24.60	5.20	6.80
C212AL	C2052	C2052									
C212AH	C2060H	C2060H	38.10	3.20	28.70	14.27	17.50	19.05	30.60	5.20	8.70
C212AHL	C2062H	C2062H									
C216AH	C2080H	C2080H	50.80	4.00	38.10	19.10	22.20	25.40	41.40	6.60	11.00
C216AHL	C2082H	C2082H									
C220AH	C2100H	C2100H	63.50	4.70	47.60	23.80	28.60	31.80	50.40	8.70	13.00
C220AHL	C2102H	C2102H									
C224AH	C2120H	C2120H	76.20	5.50	57.20	28.60	33.30	37.30	60.10	10.30	14.80
C224AHL	C2122H	C2122H									

Double Pitch Conveyor Chain Attachments


A-1

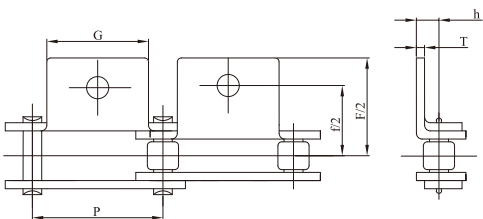


K-1

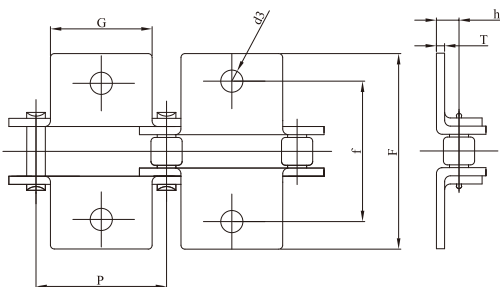

A-2

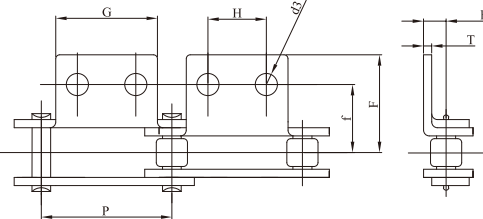


K-2

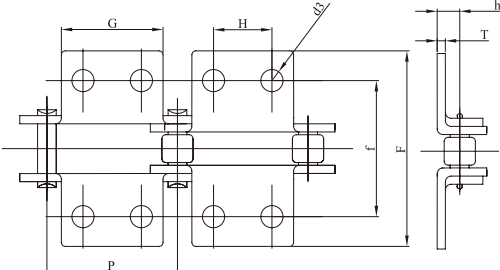

ISO Chain No	ANSI Chain No	KMC Chain No	Pitch		Link Plate Thickness	Attachment Dimension				
			P	T		G	H	f	F	h
			mm	mm		mm	mm	mm	mm	mm
C208A	C2040	C2040	25.40	1.50	19.10	9.52	25.40	38.40	9.20	3.60
C208AL	C2042	C2042								5.20
C210A	C2050	C2050	31.75	2.00	23.80	11.91	31.76	47.60	11.10	5.20
C212AL	C2052	C2052								6.80
C212AH	C2060H	C2060H	38.10	3.20	28.70	14.27	42.90	62.48	14.30	5.20
C212AHL	C2062H	C2062H								8.70
C216AH	C2080H	C2080H	50.80	4.00	38.10	19.05	55.60	82.80	19.05	6.80
C216AHL	C2082H	C2082H								
C224AH	C2120H	C2120H	76.2	5.50	57.2	28.6	79.30	121.4	27.80	10.3
C224AHL	C2122H	C2122H								

Double Pitch Conveyor Chain Attachments


G Type Attachment

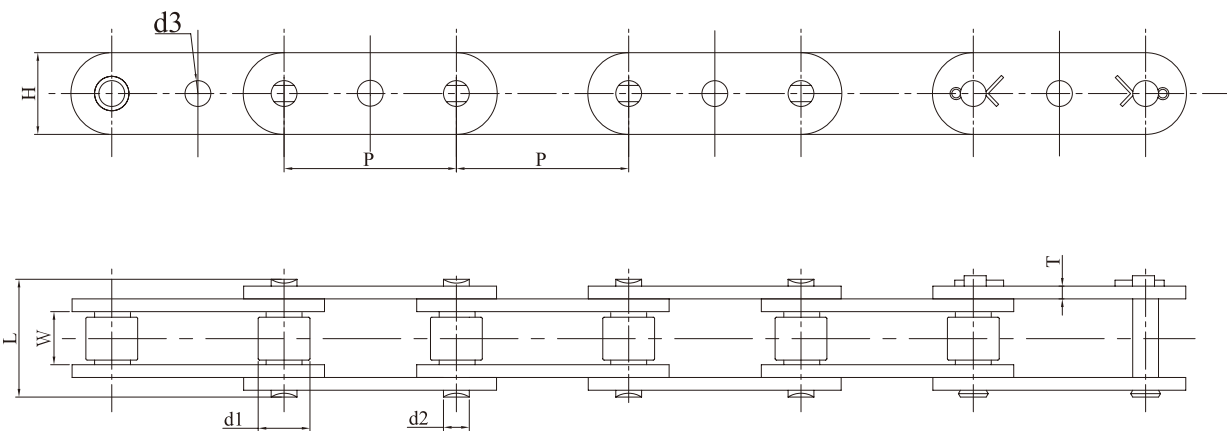


ISO Chain No	ANSI Chain No	KMC Chain No	Pitch	Roller Link Width	Roller Outer Diameter	Pin Outer Diameter	Pin Length		Link Plate Height	Link Plate Thickness	Hole Diameter
			P	W min	d1 max	d2 max	L max	Lc max	H max	T	D3
			mm	mm	mm	mm	mm	mm	mm	mm	mm
C210A	C2050	C2050	31.75	9.4	10.16	5.09	21.80	25.00	15.00	2.00	"8.00(5.1)"
C210AL	C2052	C2052			19.05						
C216AH	C2080H	C2080H	50.8	15.75	15.88	7.94	37.40	42.80	24.10	4.00	"11.0(8.1)"
C216AHL	C2082H	C2082H			28.58						

Large Pitch Conveyor Chain Attachments

A-1

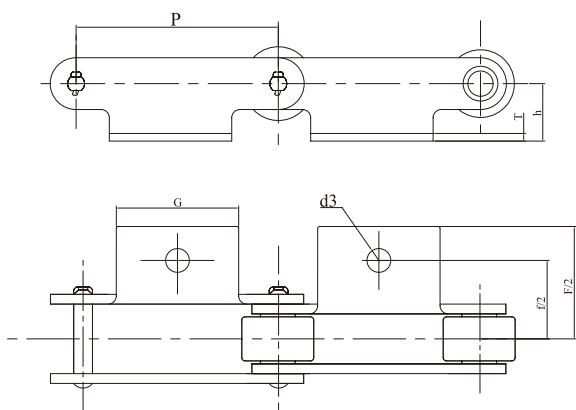


K-1

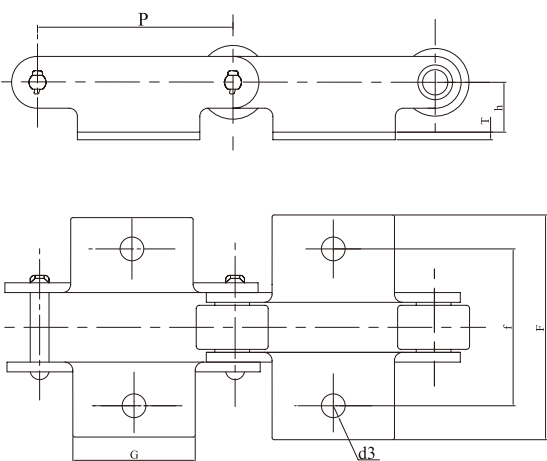


ISO Chain No	Roller Model	P	h	f	F	G	T	d3	Bolt Type
C03100	R.F.S	100	20	60	92	65	3.20	10	M8
C05075	R.F.S	75				55			
C05100	R.F.S	100	22	70	104.6	65	4.50	10	M8
C05150	R.F.S	150				85			
C10100	R.F.S	100	28	100	133.2	70	6.30	12	M10
C10150	R.F.S	150				90			

Large Pitch Conveyor Chain Attachments

A-2

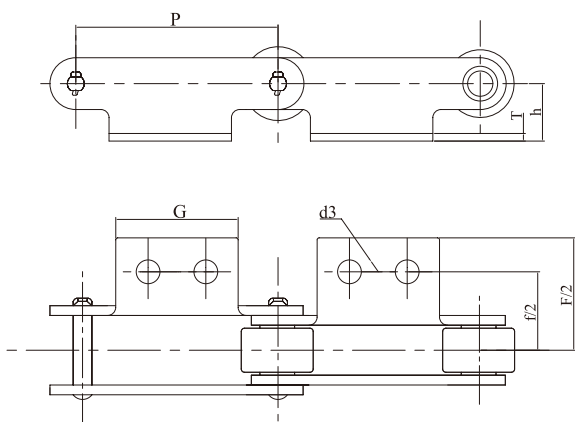


K-2

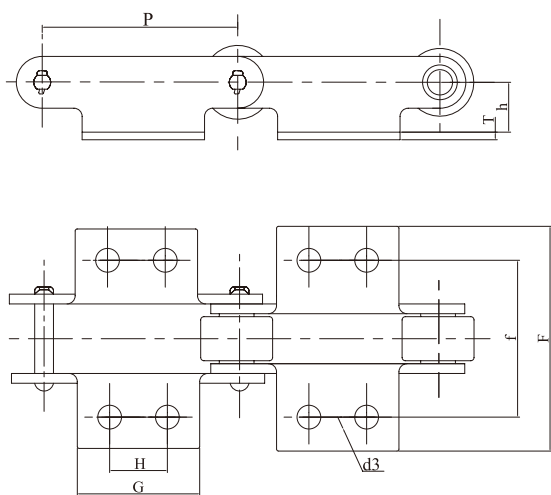


ISO Chain No	Roller Model	P	h	f	F	G	H	T	d3	Bolt Type
C03100	R.F.S	100	20	60	92	65	40	3.20	10	M8
C05075	R.F.S	75				55	30			
C05100	R.F.S	100	22	70	104.6	65	40	4.50	10	M8
C05150	R.F.S	150				85	60			
C10100	R.F.S	100				70	40			
C10150	R.F.S	150	28	100	133.2	90	60	6.30	12	M10

Large Pitch Conveyor Chain Attachments

SA-2

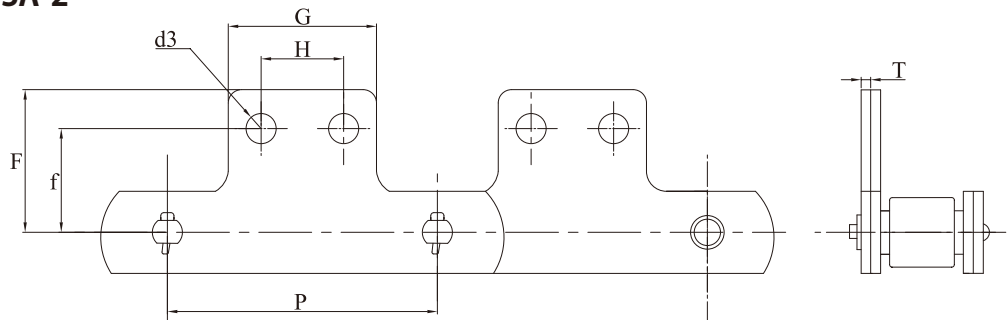


SK-2

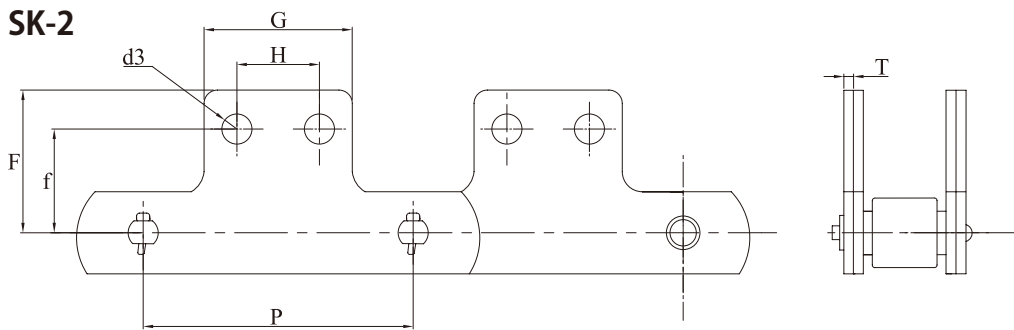


KMC Chain No	Roller Model	P	h	f	F	G	T	d3	Bolt Type
C03100	R.F.S	100	33	49	40	65	3.20	10	M8
C05100	R.F.S	100			40	65			
C05150	R.F.S	150	33.4	50.7	60	85	4.50	10	M8
C10100	R.F.S	100			40	70			
C10150	R.F.S	150	46.4	63	60	90	6.30	12	M10

Stainless steel Roller Chain Attachments

A-1

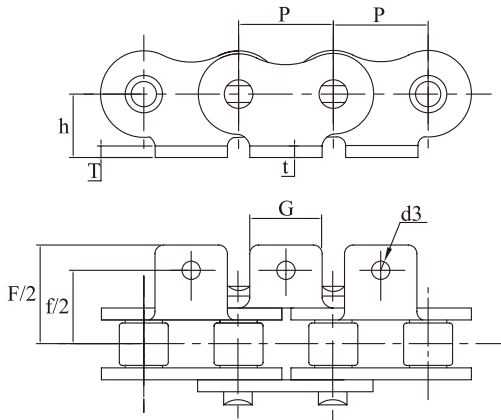


K-1

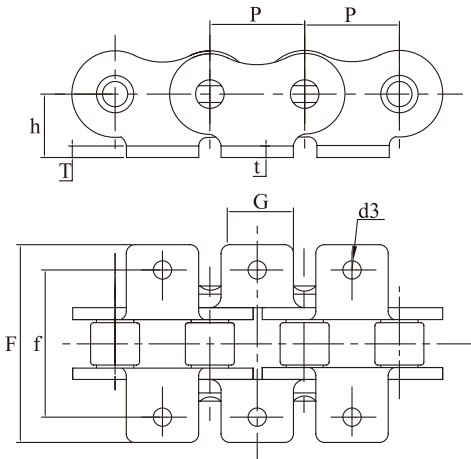


KMC Chain No	Pitch	Link Plate Thickness	Attachment Height	Attachment Dimension			
	P	T/t	G	f	F	d3	h
	mm	mm	mm	mm	mm	mm	mm
35SS	9.525	1.20	7.92	28.60	19.04	2.60	6.40
40SS	12.70	1.50	9.50	35.00	25.40	3.60	8.50
50SS	15.875	2.00	12.70	45.20	31.76	5.20	10.60
60SS	19.05	2.35	15.90	54.00	38.10	5.20	12.20
80SS	25.40	3.20	19.05	69.60	50.80	6.80	16.10

Stainless Steel Roller Chain Attachments

SA-1

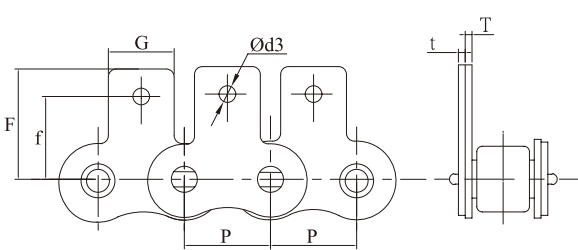


SK-1

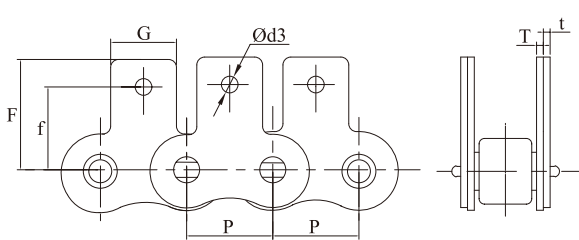


KMC Chain No	Pitch	Link Plate Thickness	Attachment Height	Attachment Dimension		
	P	T/t	G	F	f	d3
	mm	mm	mm	mm	mm	mm
35SS	9.525	1.20	7.92	14.66	9.52	2.60
40SS	12.70	1.50	9.50	17.50	12.70	3.60
50SS	15.875	2.00	12.70	22.60	15.88	5.20
60SS	19.05	2.35	15.90	26.20	18.30	5.20
80SS	25.40	3.20	19.05	34.00	24.60	6.80

Double Pitch Stainless Steel Conveyor Chain Attachments


A-1

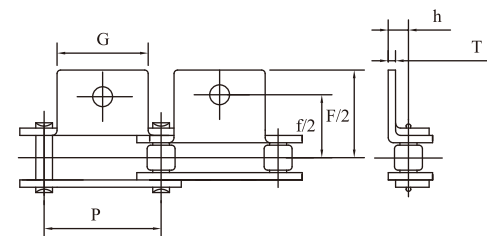


K-1

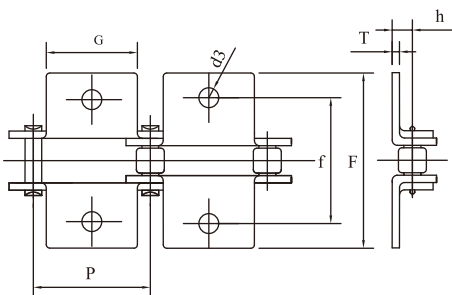

A-2

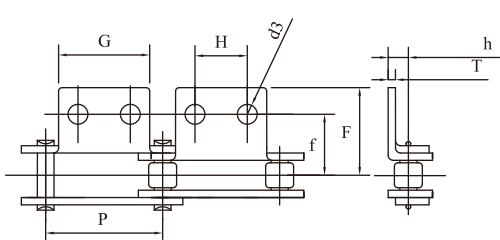


K-2

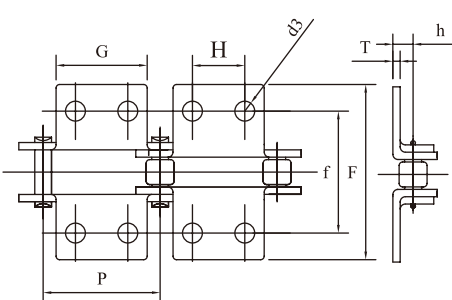


KMC Chain No	Pitch	Attachment Height	Link Plate Thickness	Attachment Dimension				
	P	G	T	H	f	F	h	d3
	mm	mm	mm	mm	mm	mm	mm	mm
C2040SS	25.40	19.10	1.50	9.52	25.40	38.40	9.20	3.60
C2042SS								5.20
C2050SS	31.75	23.80	2.00	11.91	31.76	48.56	11.10	5.20
C2052SS								6.80
C2060HSS	38.10	28.80	3.20	14.30	42.90	62.74	14.30	5.50
C2062HSS								
C2080HSS	50.80	38.10	4.00	19.10	55.60	83.60	19.10	6.80
C2082HSS								

Double Pitch Stainless Steel Conveyor Chain Attachments


SA-1

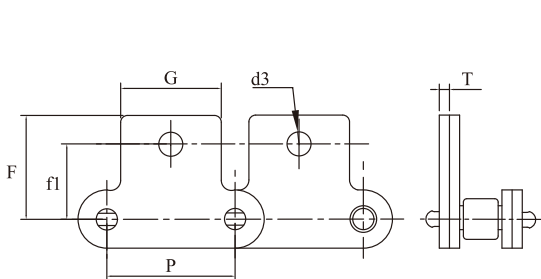


SK-1

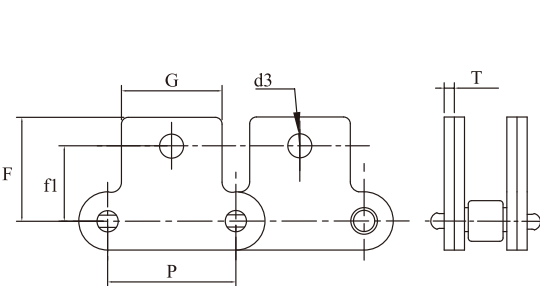

SA-2

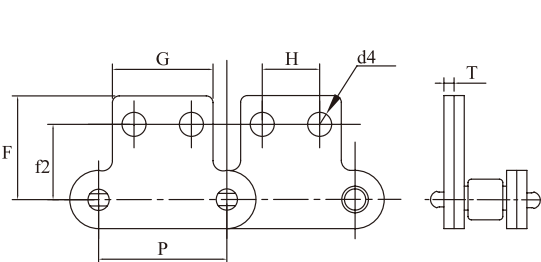


SK-2

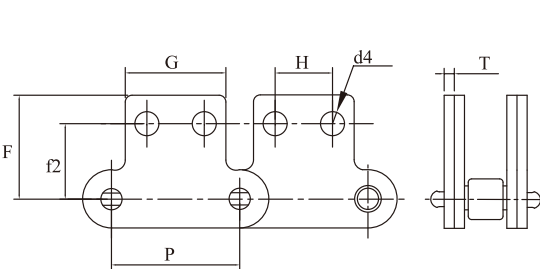

KMC Chain No	Pitch	Attachment Height	Link Plate Thickness	Attachment Dimension					
	P	G	T	H	f1	f2	F	d4	d3
	mm	mm	mm	mm	mm	mm	mm	mm	mm
C2040SS	25.40	19.10	1.50	9.52	11.12	13.50	19.80	3.60	5.20
C2042SS									
C2050SS	31.75	23.80	2.00	11.91	14.27	15.88	24.60	5.20	6.80
C2052SS									
C2060HSS	38.10	28.80	3.20	14.30	17.48	19.05	30.65	5.20	8.70
C2062HSS									
C2080HSS	50.80	38.10	4.00	19.10	22.20	25.40	41.40	6.80	10.30
C2082HSS									


Oring Chain Attachments

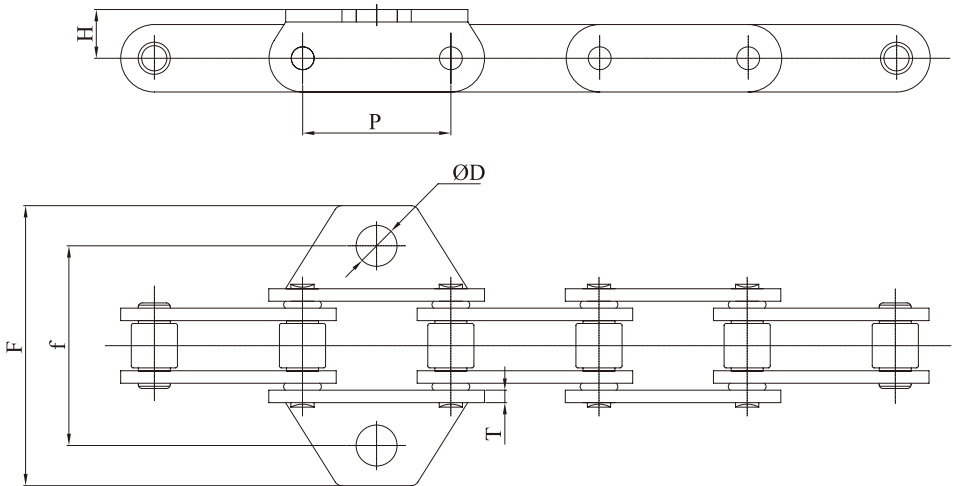

KMC Chain No	P	f	F	ØD	H	T
	mm	mm	mm/Max	mm	mm	mm
C2060RO-K1(Ø8.5x42.9)	38.10	42.90	64.20	8.50	14.30	2.35
C2060RO-K1(Ø10.5x48)	38.10	48.00	64.20	10.50	14.30	2.35
C2060HRO-K1(Ø8.5x42.9)	38.10	42.90	69.10	8.50	14.30	3.20



Services & Logistics

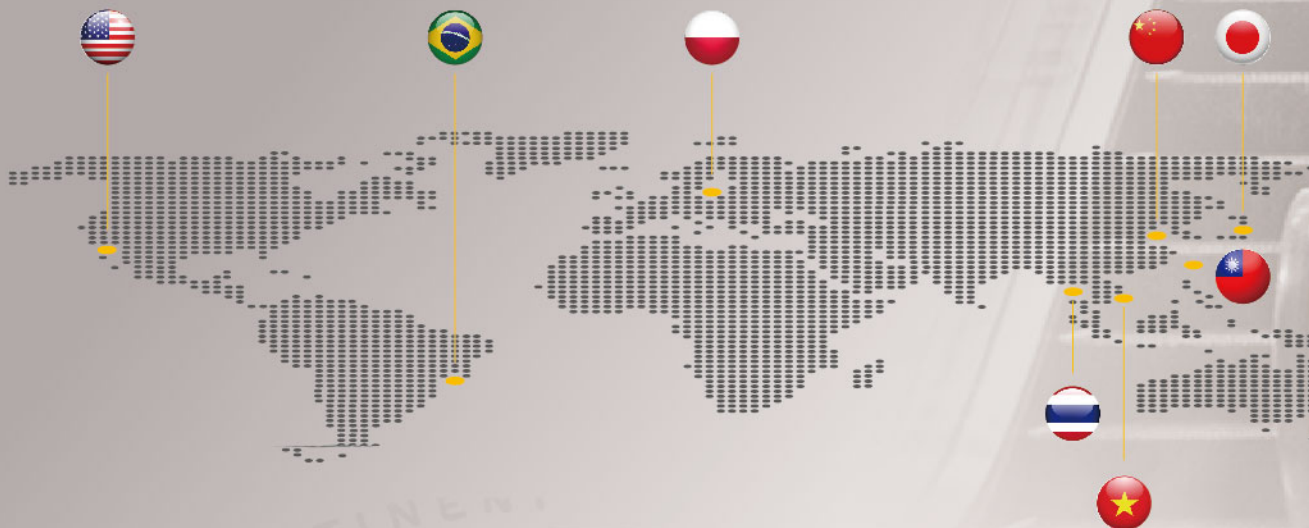

Taiwan

Headquarter
Factory
Logistics

China

Factory
Logistics

Thailand

Factory
Logistics

Japan

Logistics

Vietnam

Logistics

USA

Logistics

Brazil

Logistics

Poland

Logistics



AMazing power transmission